

Thermo Top C Parking Heater



Installation Documentation

Chrysler Grand Voyager

2.8 CRD

From model year 2008

Left-hand drive vehicle

Automatic air-conditioning



WARNING!

Hazard warning:

The improper installation or repair of Webasto heating and cooling systems can cause fire or the leakage of deadly carbon monoxide, leading to serious injury or death.



To install and repair Webasto heating and cooling systems you need to have completed a special company training course and have the appropriate technical documentation, special tools and special equipment.

Only use genuine Webasto parts. See the Webasto air and water heaters accessories catalogue for this purpose.

NEVER attempt to install or repair Webasto heating or cooling systems if you have not successfully completed the company training and thereby acquired the required technical skills, or if you do not have access to the required technical documentation, tools and equipment needed to carry out correct installation and repairs.

ALWAYS follow all Webasto installation and repair instructions and observe all warnings.

The initial startup is to be executed with the Webasto Thermo Test Diagnosis.

Webasto does not accept any liability for defects and damage that are attributable to installation by untrained staff.

Table of Contents

Validity	2	Preparing Installation Location	12
Heater / Installation Kit	3	Preparing Heater	14
Foreword	3	Installing Heater	15
General Instructions	3	Coolant Circuit	16
Special Tools	3	Fuel	20
Explanatory Notes on Document	4	Installing Control Unit	23
Preliminary Works	5	Final Work	24
Installation Location of Heater	5	Fuel Standpipe Template	25
Preparing Electrical System	6	Operating Instructions for End Customer	26
Electrical System	7		
Fan Controller	8		
Remote Option (Telestart)	11		

Validity

Manufacturer	Model	Type	EG-BE-No. / ABE
Chrysler (USA)	Grand Voyager	rt	e11 * 2001 / 116 * 0144 * ...

Engine type	Engine model	Output in kW	Displacement in cm ³
VM 64 C	Diesel	120	2777
5 / VM 25 D	Diesel	120	2776

Vehicle and engine types, equipment variants and national specifications not listed in this installation documentation have not been tested. However, installation according to this installation documentation may be possible.

The installation location of the digital timer should be confirmed with the end customer before installation.

Note:

When the vehicle is delivered, the fuel tank should be filled with as little fuel as possible!



Heater / Installation Kit

Quantity	Description	Order No.:
1	Basic delivery scope of <i>Thermo Top C</i>	see price list
1	Installation kit for Chrysler Grand Voyager 2008 2.8 CRD	1313748A
1	Heater control	see price list

Foreword

This installation documentation applies to Chrysler Grand Voyager 2.8 CRD vehicles - for validity, see page 2 - from model year 2008 and later, assuming technical modifications to the vehicle do not affect installation, any liability claims excluded. Depending on the vehicle version and equipment, modifications may be necessary during installation with respect to this "installation documentation."

In each case however, the specifications of this "installation documentation"; the "operating instructions" and the "installation instructions" of *Thermo Top C* must be followed.

The corresponding rules of technology and any information from the vehicle manufacturer should be observed during the installation work.

General Instructions

Installation should be carried out according to the general, standard rules of technology. Unless specified otherwise, fasten hoses, lines and wiring harnesses to original vehicle lines and wiring harnesses using cable ties. Insulate loose wires and tie back. Connectors on electronic components have to audibly click into place.

Sharp edges should be fitted with rub protection. Spray unfinished body areas, e.g. drilled holes, with anti-corrosion wax (Tectyl 100K, Order No. 111329).

When installing an IPCU, the corresponding settings must be checked or adjusted before the installation.


Special Tools

- Torque wrench for 2.0 - 10 Nm
- Hose clamping pliers
- Metric thread-setter kit
- Chrysler special tool number: 9340 (Installation and removal of fuel-tank sending unit)


Explanatory Notes on Document

You will find an identification mark on the outside top right corner of the page in question to provide you with a quick overview of the individual working steps.


Mechanical system




Electrical System




Coolant Circuit




Fuel




Exhaust Gas



Combustion Air



Software



Special features are highlighted using the following symbols:



Specific risk of injury or fatal accidents.



Specific risk of damage to components.




Specific risk of fire or explosion.



Reference to general installation instructions of Webasto components or to the manufacturer's vehicle-specific documents.



Reference to a special technical feature.



The arrow in the vehicle icon indicates the position on the vehicle and the viewing angle.

All dimensions are in mm!

Tightening torque of hose clamps = 2.0 + 0.5 Nm!

Tightening torque of Ejet screws, Ejet studs = 10 Nm!

Preliminary Works

WARNING!

- Open the fuel tank cap and vent the fuel tank.
- Empty the fuel tank.
- Close the fuel tank cap again.
- Disconnect the battery "earth" connection.
- Depressurise the cooling system.
- Copy the factory number from the original type label to the duplicate type label.
- Remove years that do not apply from the duplicate label.
- Attach the duplicate label (type label) in the appropriate place.
- Remove the engine cover.
- Completely remove the battery.
- Remove the charge-air tube.
- Detach the wheel well trim on the right and left.
- Remove the bumper.
- Remove the fuel tank according to the manufacturer's instructions.
- Remove the fuel tank sending unit according to the manufacturer's instructions.
- Remove the lower instrument panel trim on the driver's side.
- Remove the footwell trim on the front passenger's side.
- Remove the A/C control panel in accordance with the manufacturer's instructions.

Please remove page 26 "Operating Instructions for End Customer" and add it to the vehicle operating instructions.



Installation Location of Heater

- 1 Heater


Installation
location



Preparing Electrical System

Wire sections retain their numbering throughout the whole document!


Cutting wires to length

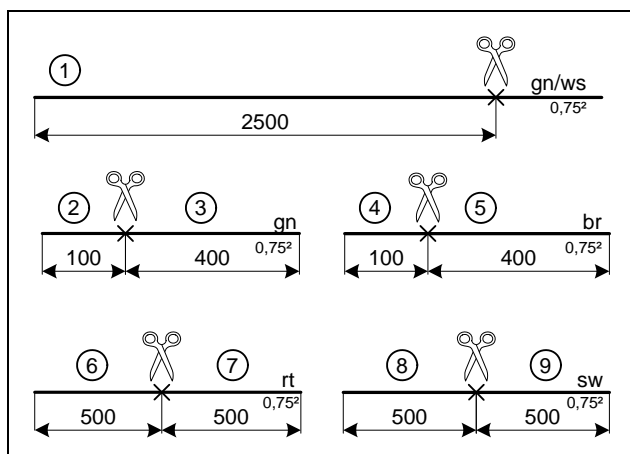

Produce connections as shown in wiring diagram. Pull wire section 1 into protective sleeving.

- ⑩ Red (rt) wire from K3/87a premounted
- ⑪ Black (sw) wire from K3/30 premounted


Preparing K3 relay

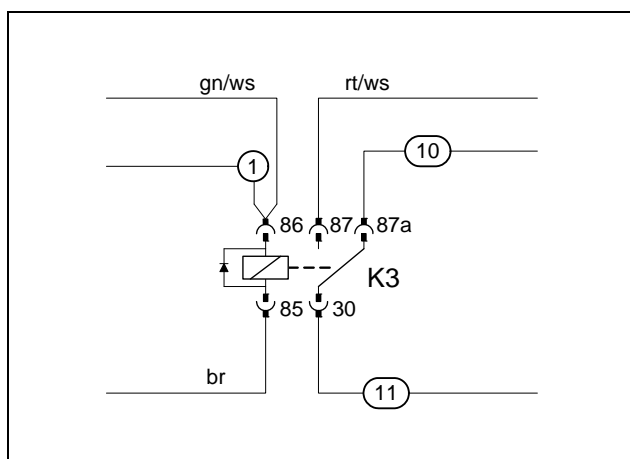

Connect wires to IPCU socket. Pull wire sections 3 and 5 into protective sleeving. IPCU view on contact side! The IPCU provided in the kit is preprogrammed with the following adjustment values:

Duty cycle: 55%
Frequency: 100Hz
Voltage: 5.0V
Function: Low-side

Preparing IPCU and K3.1 relay

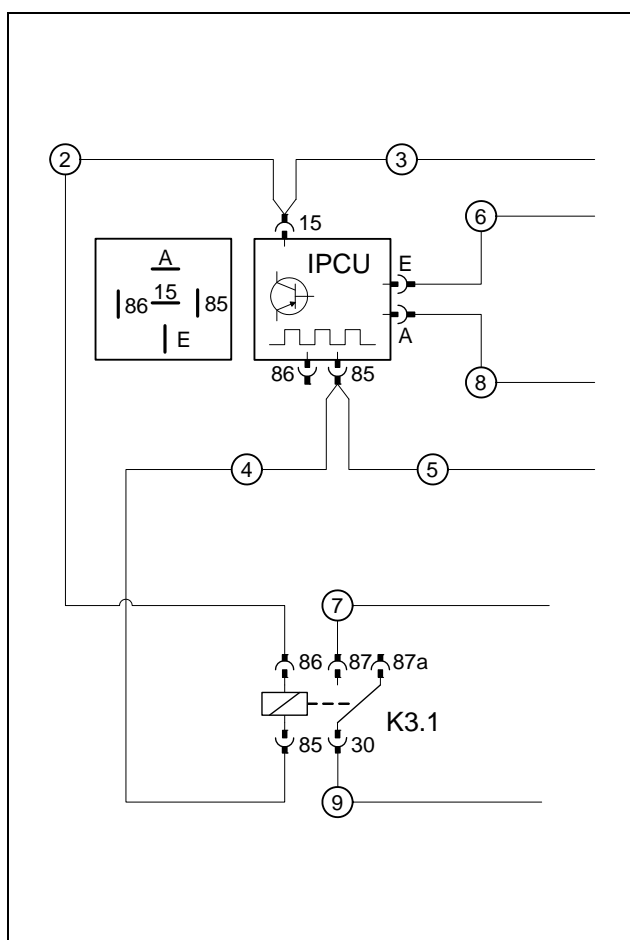


On heater activation, the adjustment values are to be controlled and corrective measures are to be taken if necessary.



Electrical System




Wiring harness pass through

Route wiring harnesses of digital timer, fan controller and green/white (gn/ws) wire with suitable materials (fuel line) from engine compartment through protective rubber plug 1 into passenger compartment.

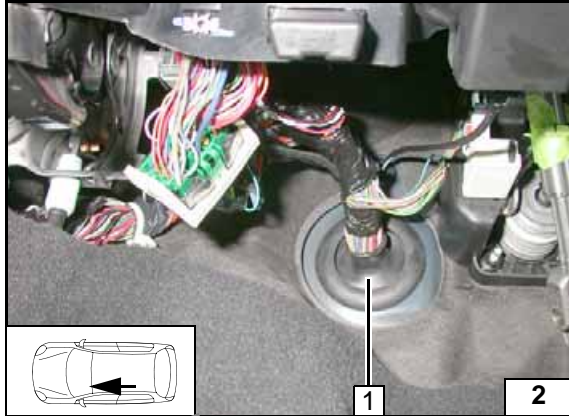


Digital timer

1 Digital timer

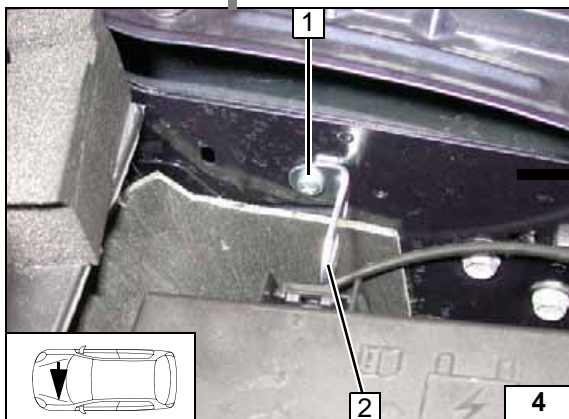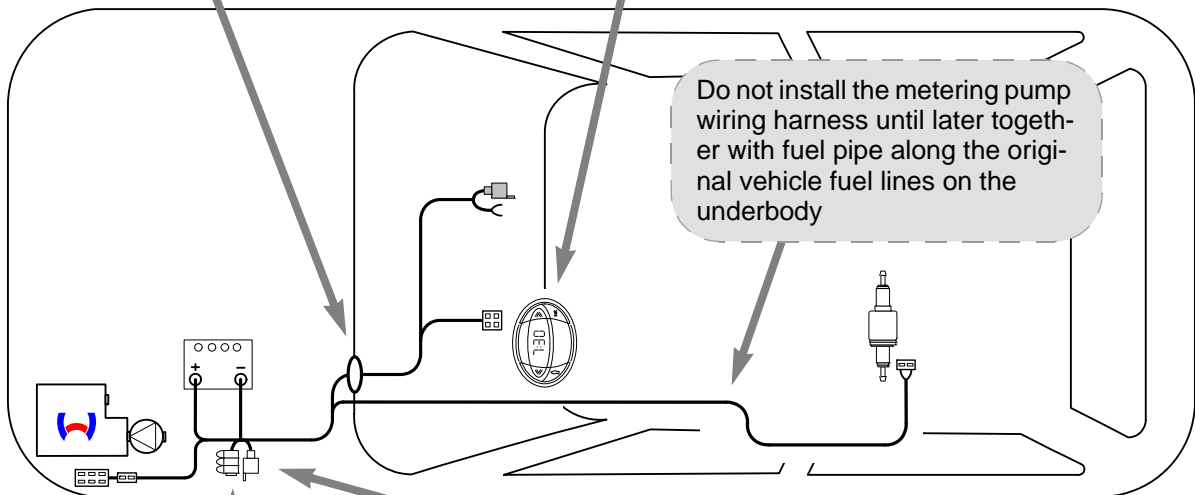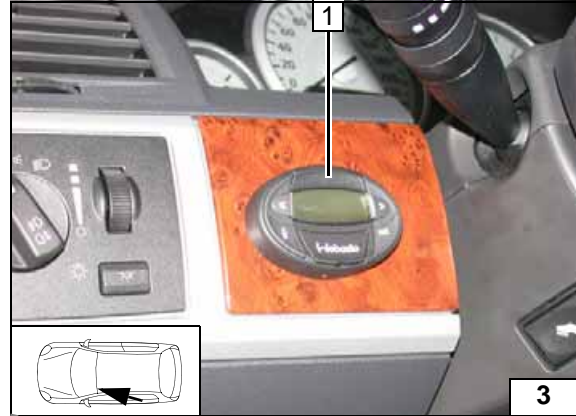

Fuse holder, K3 relay

- 1 Existing hole, 5.5x13 self-tapping screw
- 2 Angle bracket

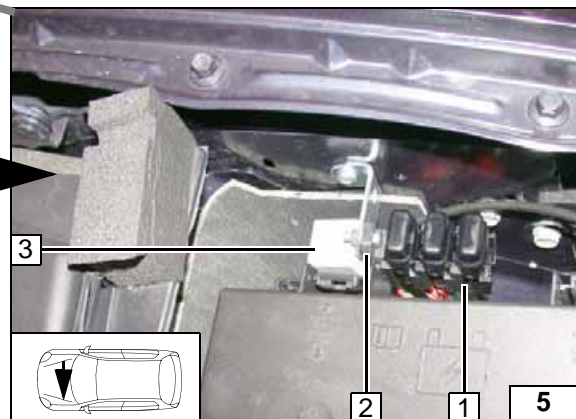

Fuse holder, K3 relay

- 1 Fuses attached
- 2 M5x16 bolt, retaining plate for fuse holder, washer, flanged nut
- 3 K3 relay




Wiring harness routing installation diagram



Fan Controller




Wiring diagram

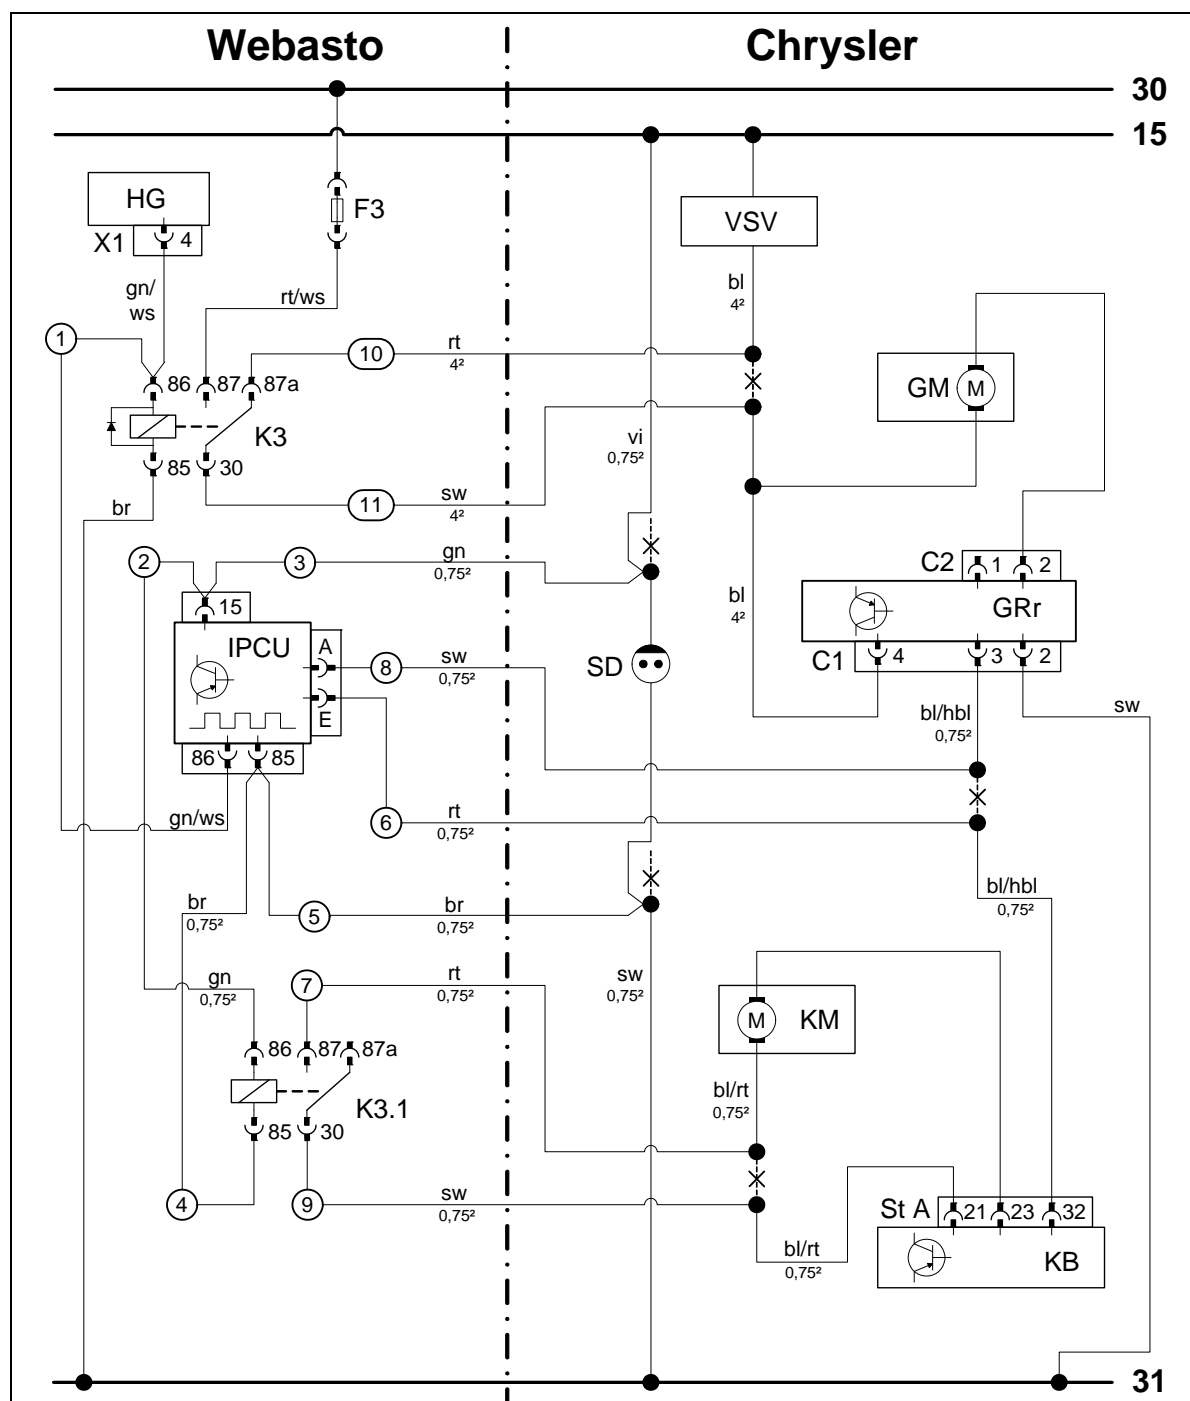

Webasto components		Vehicle components		Colours and symbols	
HG	Heater TT-C	VSV	Power supply module	rt	red
X1	6-pin heater connector	GM	Fan motor	ws	white
F3	25A fuse	C2	GRr connector	sw	black
K3	Fan relay	GRr	Fan controller	br	brown
K3.1	Additional relay	C1	GRr 4-pin connector	gn	green
IPCU	Pulse width modulator	SD	Socket outlet of instrument panel	bl	blue
IPCU adjustment values:		KM	Valve motor	hbl	light blue
Duty cycle: 55%		St A	32-pin connector KB	vi	violet
Frequency: 100Hz		KB	A/C control panel	X	Cutting point
Voltage: 5.0V		Wiring colours may vary.			
Function: Low-side					


Legend

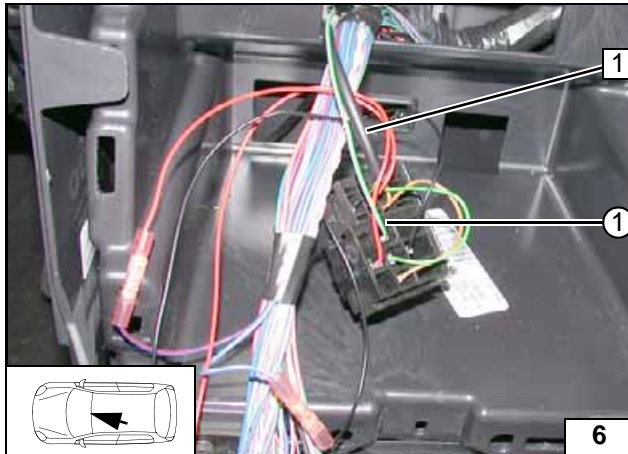

Produce connections as shown in wiring diagram. Mount green/white (gn/ws) wire ① from K3/86 into IPCU/86. Route wiring harness 1 with brown (br) ⑤ and green (gn) wire ③ downward to socket outlet on instrument panel.




**Connect-
ing IPCU**

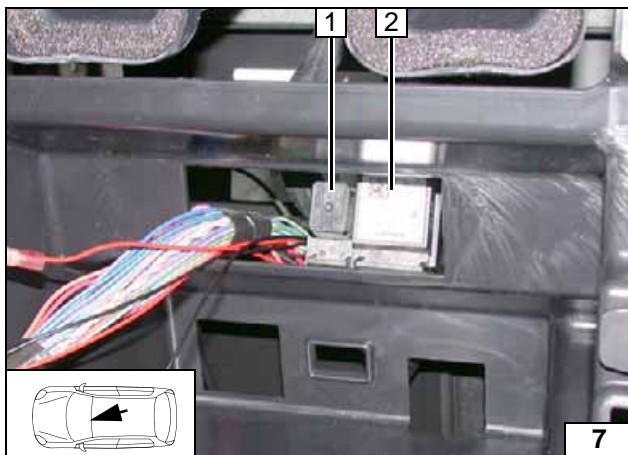

Mount IPCU 2 and K3.1 1 with double-sided adhesive tape.



**Fastening
IPCU and
K3.1**

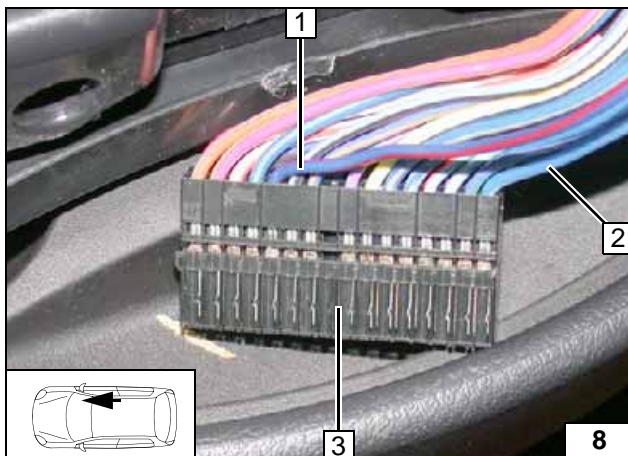


Remove 32-pin connector 3 of A/C control panel.



- 1 Blue/red (bl/rt) wire 32-pin connector wiring harness, pin 21
- 2 Blue/light blue (bl/hbl) wire 32-pin connector wiring harness, pin 32

**Connector
for A/C
control
panel**

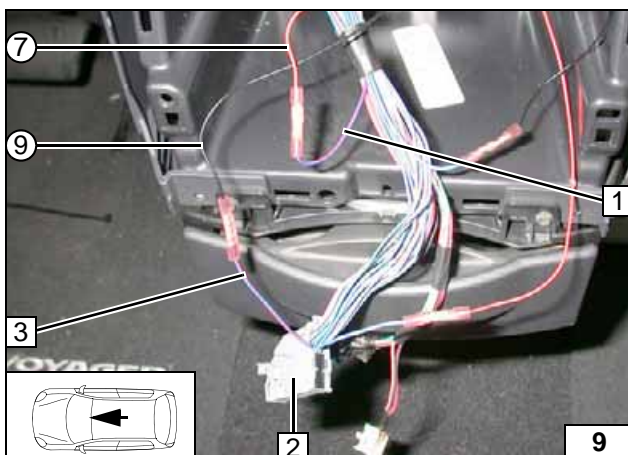


Connection of K3.1 relay on 32-pin connector 2 from A/C control panel. Produce connections as shown in wiring diagram.



- 1 Blue/red (bl/rt) wire of valve motor
- 3 Blue/red (bl/rt) wire 32-pin connector wiring harness, pin 21
- ⑦ Red (rt) wire to K3.1/87
- ⑨ Black (sw) wire to K3.1/30


**Connect-
ing A/C
control
panel**

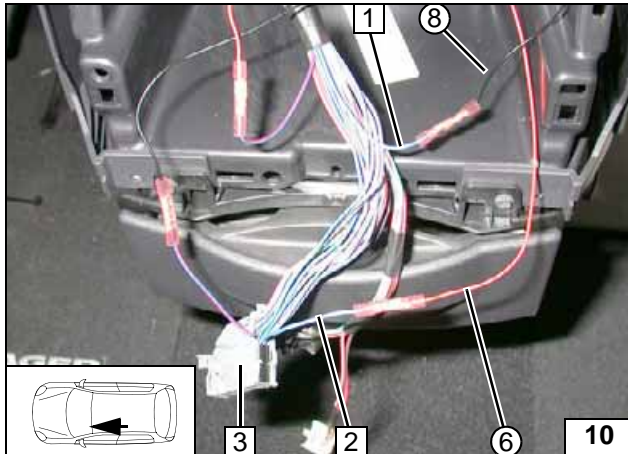

Connection of IPCU to 32-pin connector 3 from A/C control panel. Produce connections as shown in wiring diagram.

- 1 Blue/light blue (bl/hbl) wire of fan controller
- 2 Blue/light blue (bl/hbl) wire 32-pin connector wiring harness, pin 32
- ⑥ Red (rt) wire of IPCU/E
- ⑧ Black (sw) wire of IPCU/A


**Connect-
ing A/C
control
panel**

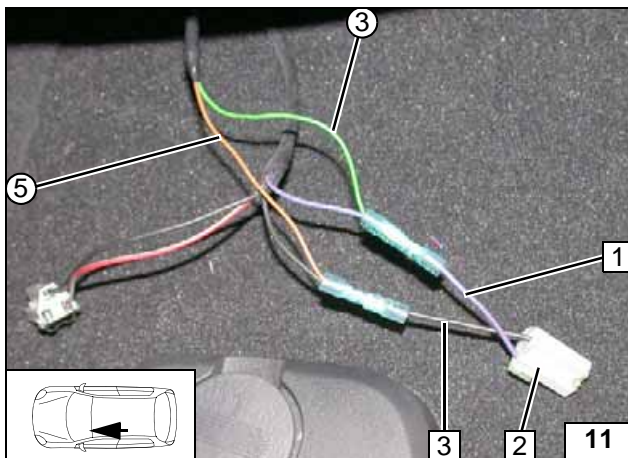

Connection on socket outlet of instrument panel 2. Produce connections as shown in wiring diagram.

- 1 Violet (vi) wire of positive wire on socket outlet (Terminal 15)
- 3 Black (sw) earth wire on socket outlet
- ③ Green (gn) wire to K3.1/86
- ⑤ Brown (br) wire to K3.1/85


**Conne-
ction of Ter-
minal 15**

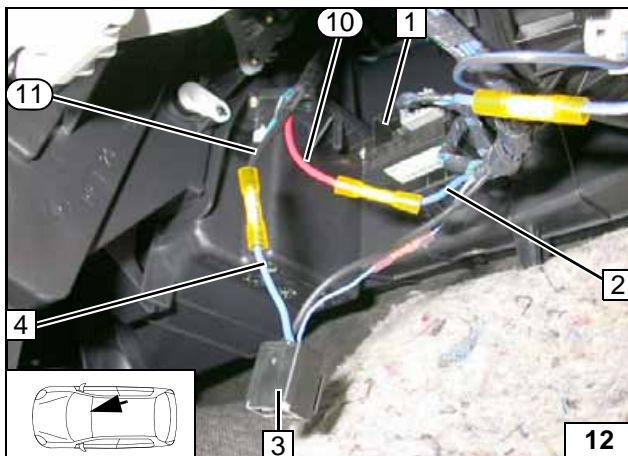

Connection to 4-pin connector C1 3 from fan controller. Produce connections as shown in wiring diagram.

- 1 Socket of connector C1
- 2 Blue (bl) wire of terminal 15
- 4 Blue (bl) wire of connector C1, pin 4
- ⑩ Red (rt) wire to K3/87a
- ⑪ Black (sw) wire to K3/30

**Connect-
ing fan con-
troller**

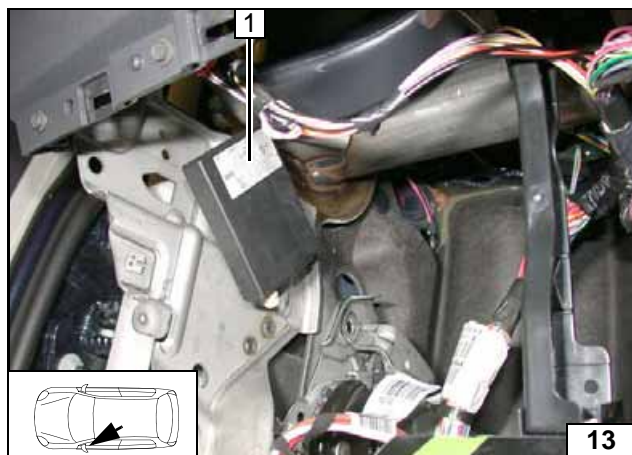


Remote Option (Telestart)

Fasten bracket on existing hole with M5x16 bolt and M5 flanged nut (see photo after next).

- 1 Receiver




Installing receiver

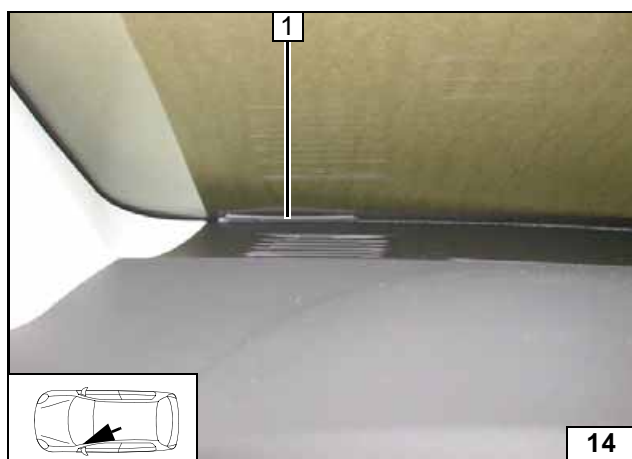

- 1 Antenna

Installing antenna

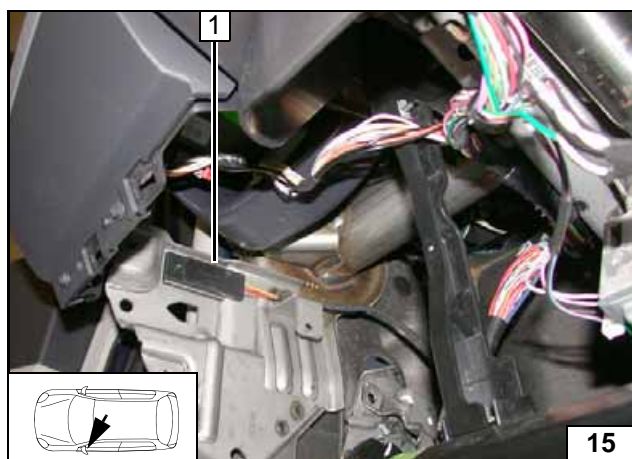


Temperature sensor for T100 HTM only

- 1 Fasten temperature sensor using suitable means




Installing temperature sensor

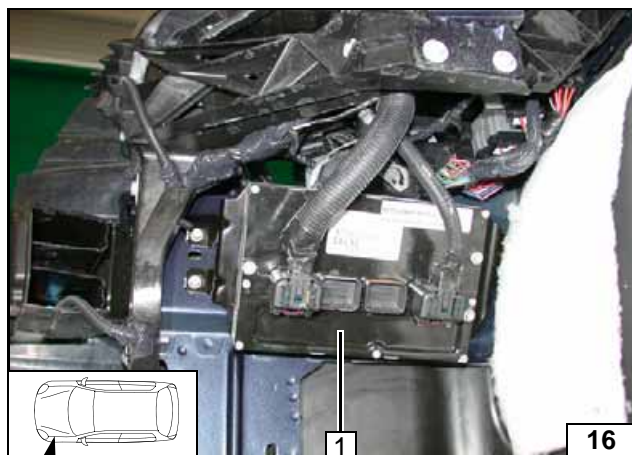

Preparing Installation Location

Remove control unit with bracket 1. Original vehicle bolts will be reused.


Removing control unit

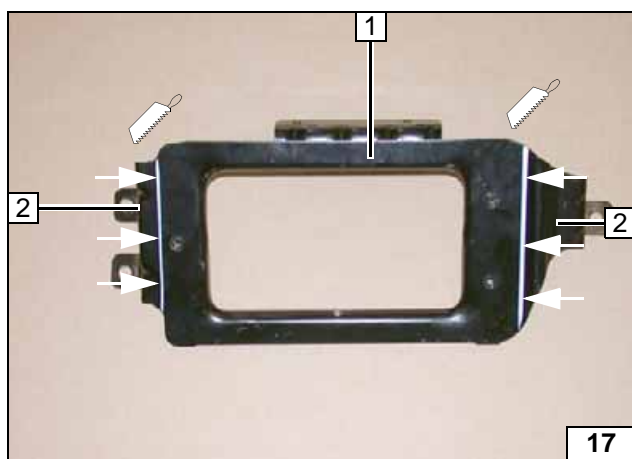

Cut bracket of control unit 1 to length at markings.


2 Discard sections

Preparing bracket of control unit

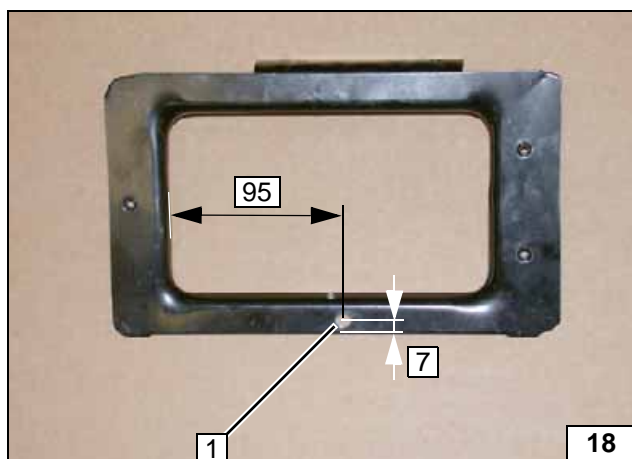

1 7mm dia. hole



Hole in bracket

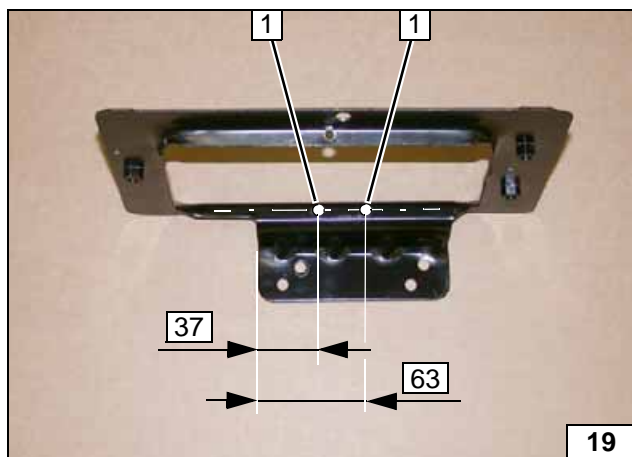

Bracket will be installed later during "Final Work".

1 Drill 5.5 mm dia. hole in centre [2x]

Hole in bracket

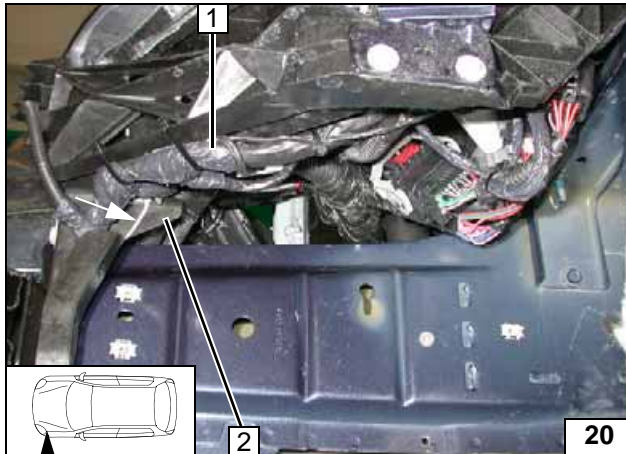


Route original vehicle wiring harness 1 and fasten using cable ties. Cut away edge at marking.

2 Discard section




Routing wiring harness

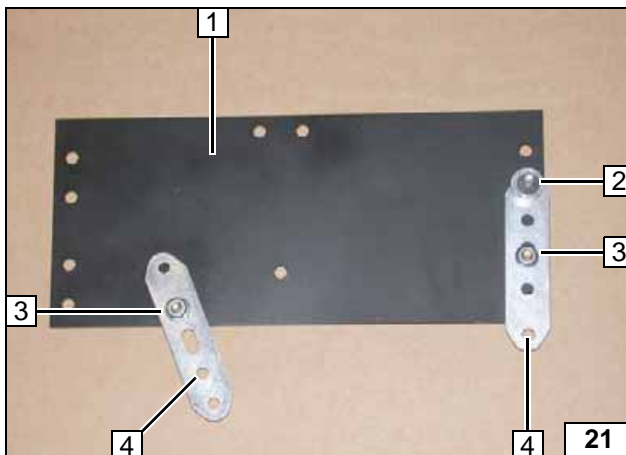

- 1 Bracket
- 2 M6x25 bolt, 8 mm shim, pin lock
- 3 M6x12 bolt, flanged nut [2x each]
- 4 Perforated bracket [2x]

Preparing bracket

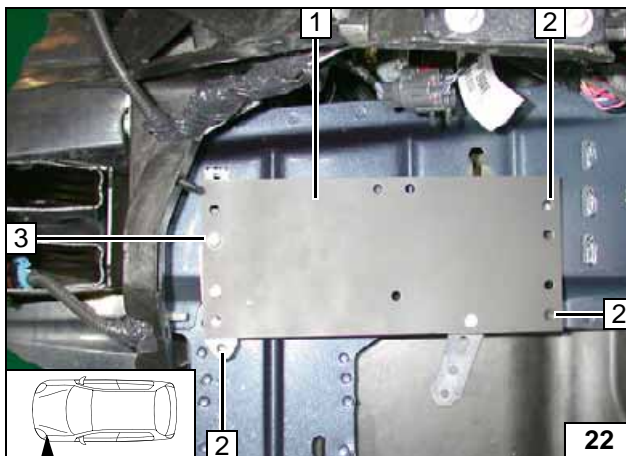


Loosely mount bracket 1 and align on lower edge of frame side member!

- 2 Copy hole pattern [3x]
- 3 Original vehicle rivet nut, M6x25 bolt



Copying hole pattern

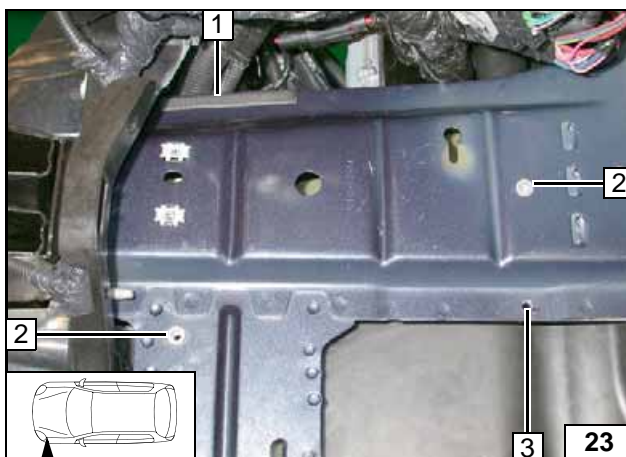


Remove bracket.

- 1 Insert edge protection
- 2 9.1mm dia. hole; rivet nut [2x each]
- 3 7mm dia. hole



Installing rivet nut

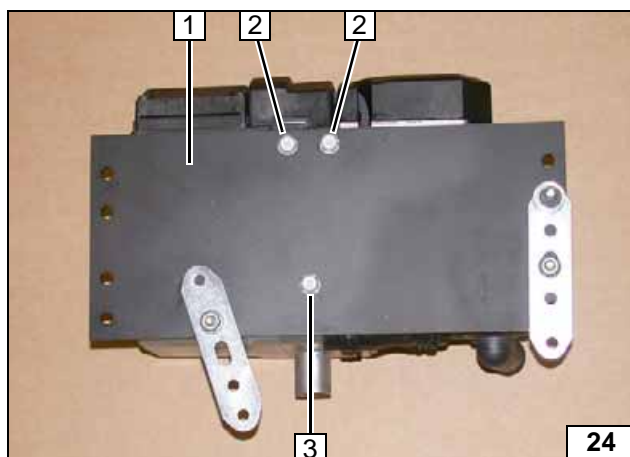


Preparing Heater

Insert two washers between heater and bracket 1 at position 3.

- 2 E-jot screw [2x]
- 3 E-jot screw, washer [2x]


Mounting bracket on heater

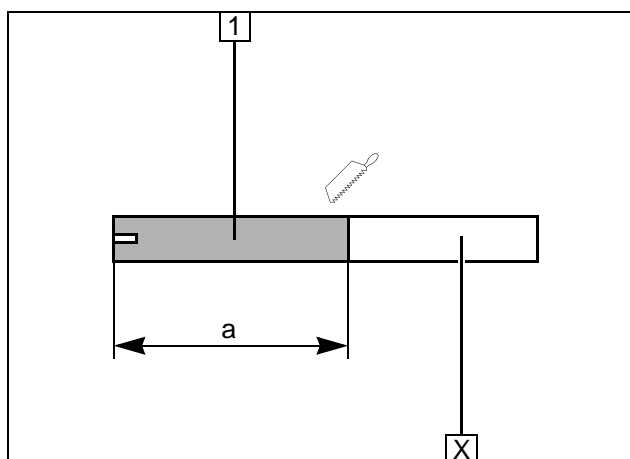

- 1 Combustion air pipe
a = 220

Discard section X


Cutting combustion air pipe to length

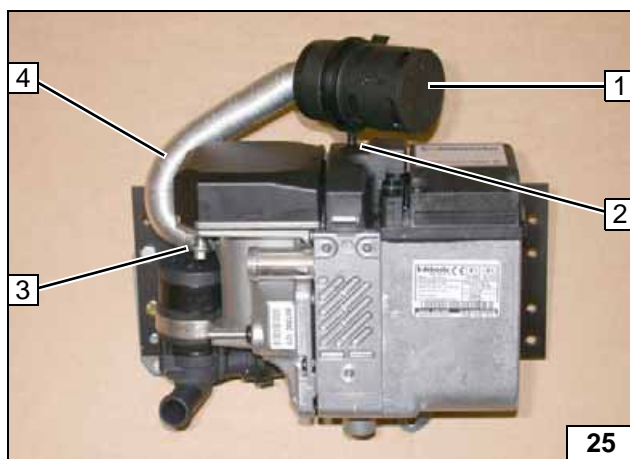

Punch through perforation on heater cover at position 2.


- 1 Silencer
- 2 Retaining clip in hole
- 3 27mm dia. clamp
- 4 Combustion air pipe

Mounting silencer

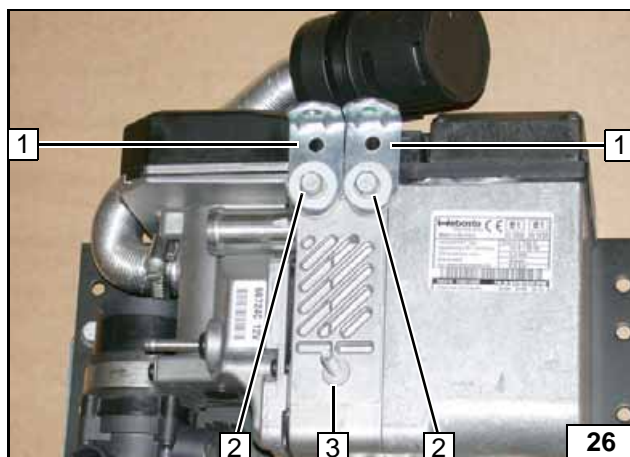

- 1 Loosely mount angle bracket [2x]
- 2 E-jot screw, large diameter washer [2x each]
- 3 E-jot stud


Loosely mounting angle bracket

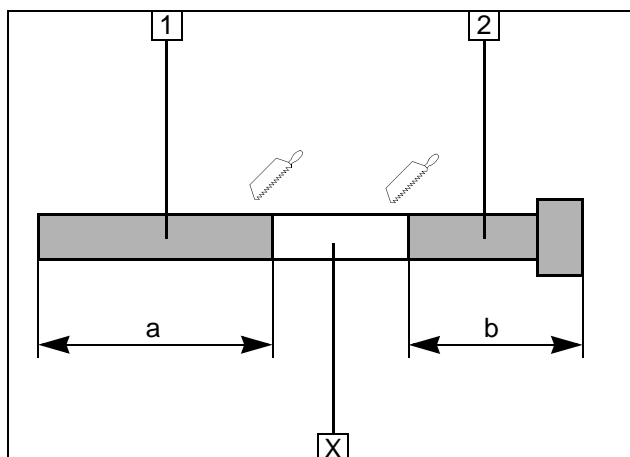

Discard section X


- 1 Exhaust pipe
a = 200
- 2 Exhaust end section
b = 180

**Preparing
exhaust
pipe**

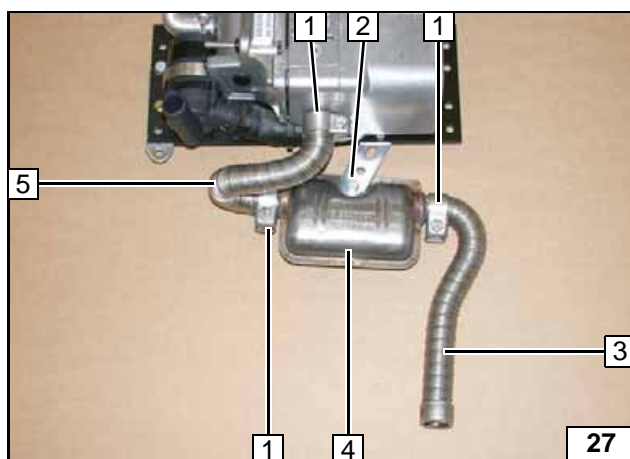

- 1 Hose clamp [3x]
- 2 M6x20 bolt, flanged nut
- 3 Exhaust-pipe end section
- 4 Exhaust silencer
- 5 Exhaust pipe


**Premount-
ing exhaust
pipe**

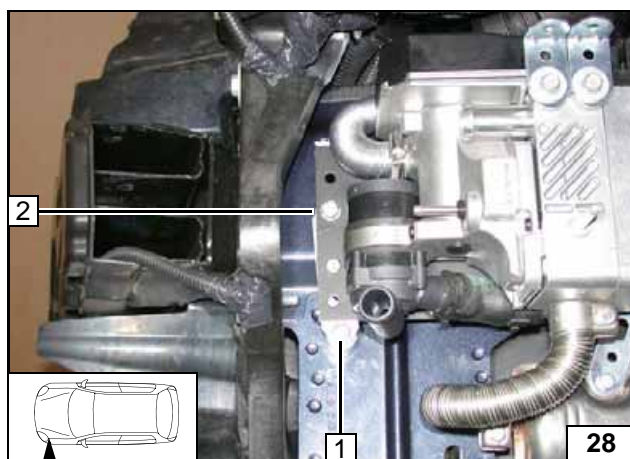

Installing Heater

- 1 M6x40 bolt, spring lockwasher, 20mm shim, rivet nut
- 2 M6x25 bolt, original vehicle rivet nut

**Mounting
heater**

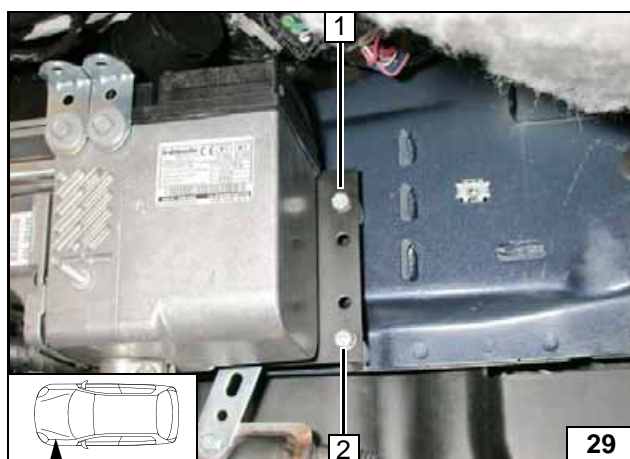

- 1 M6x40 bolt, spring lockwasher, 20mm shim, rivet nut
- 2 M6x50 bolt, spring lockwasher, 30mm shim, flanged nut

**Mounting
heater**




Coolant Circuit



WARNING!



Any coolant running off should be collected using an appropriate container. Install hoses so that they are kink-free. Unless specified otherwise, always fasten using cable ties. Position clamps so that other hoses cannot be damaged. The heater must be filled with coolant when installing the hose. The connection should be "inline" according to the following diagram:




Hose installation diagram

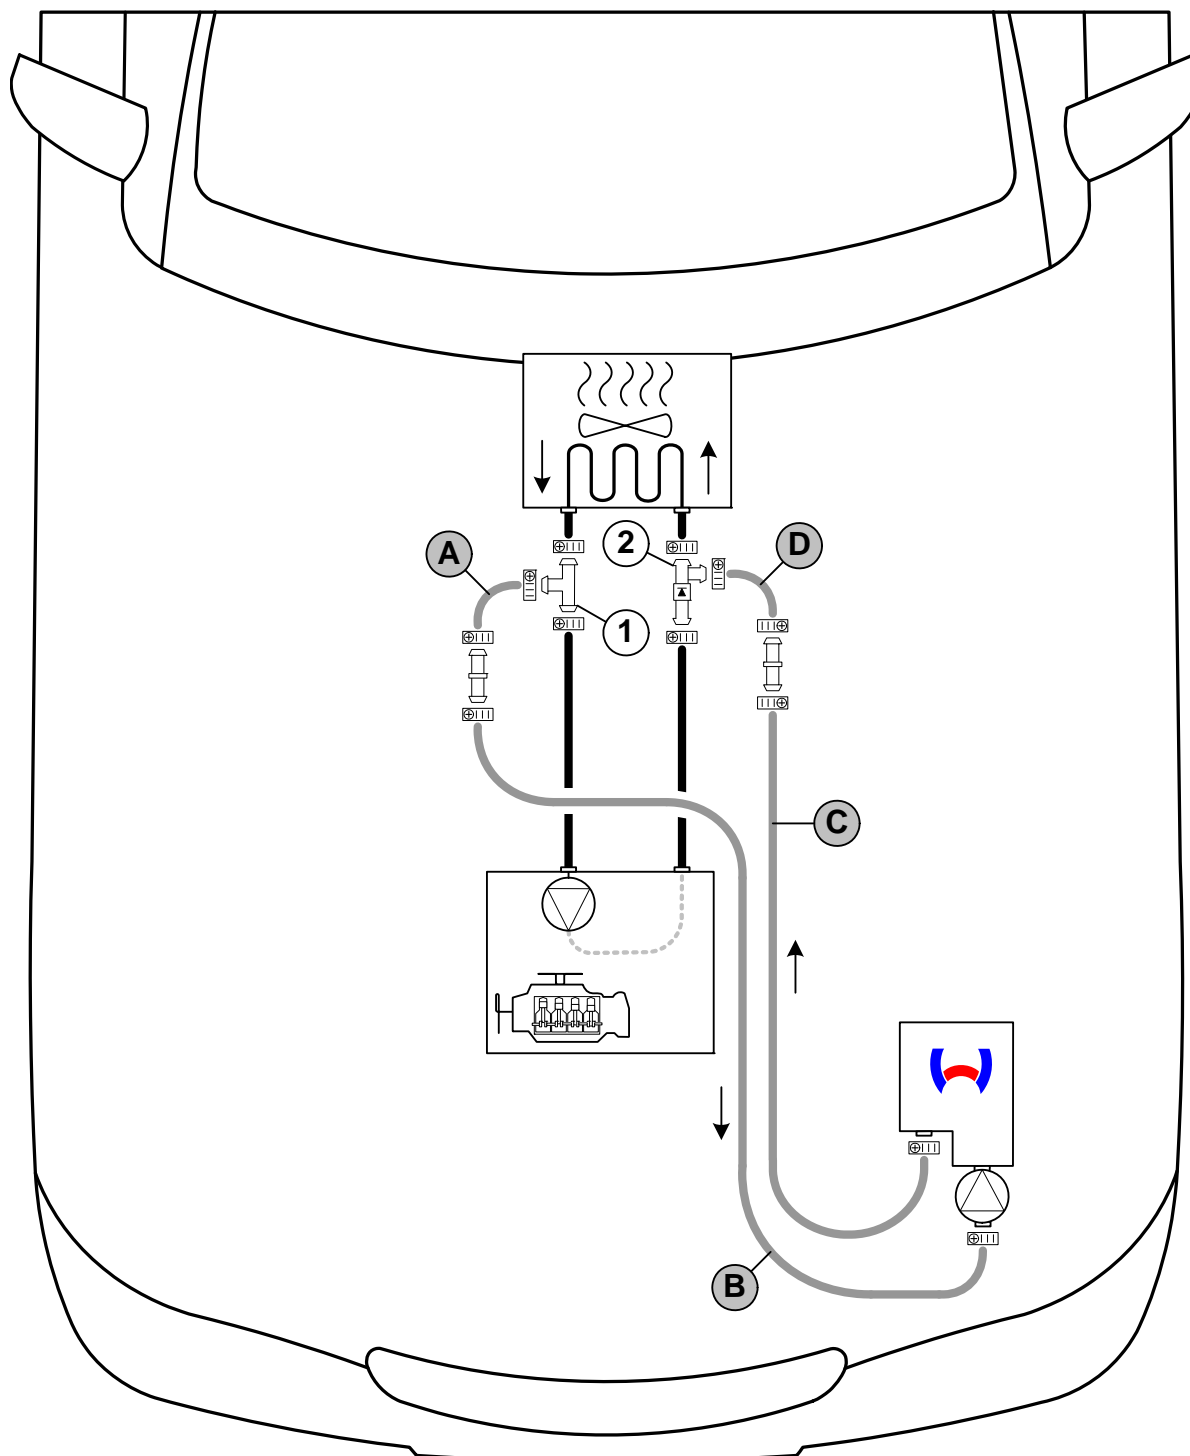

All connecting pipes  = 18x20 mm dia. All hose clamps  = 20-27 mm dia.

1 = T-piece  ! 2 = Check valve  !




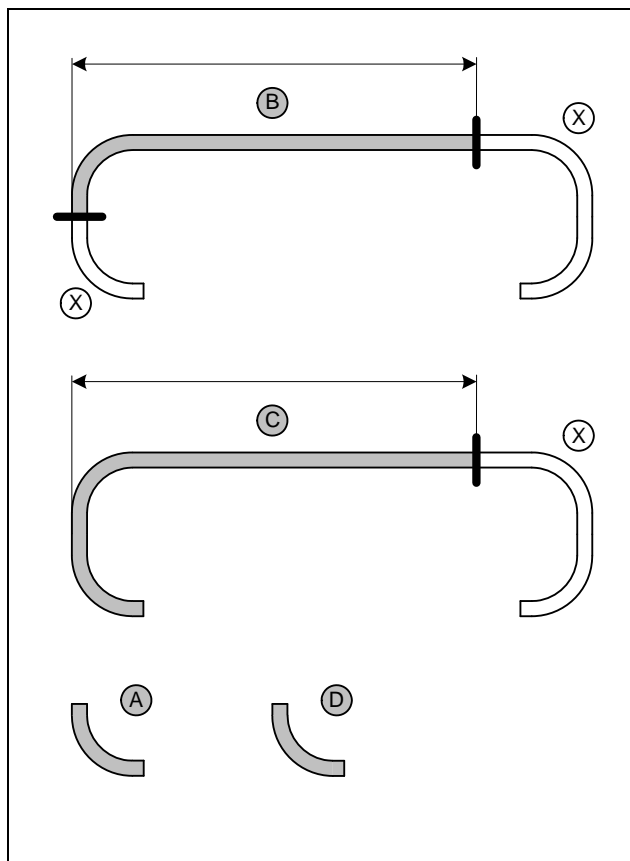

Hose **A** = 90° elbow, 18x18mm dia.
Hose **D** = 90° elbow, 18x18mm dia.
Discard section **X**.

B = 1260
C = 1140


Cutting hoses to length

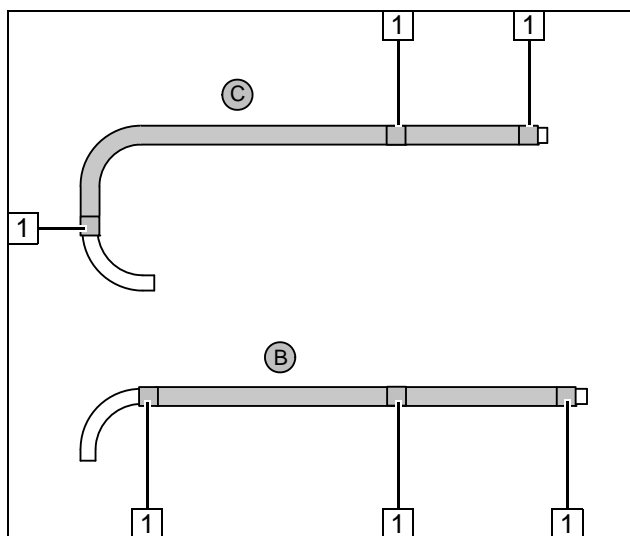

Divide braided protection hose in middle.
Push one and a half braided protection hose each onto hose **B** and **C**.
Cut heat shrink plastic tubing to length.


1 50 mm long heat shrink plastic tubing [6x]

Preparing hoses

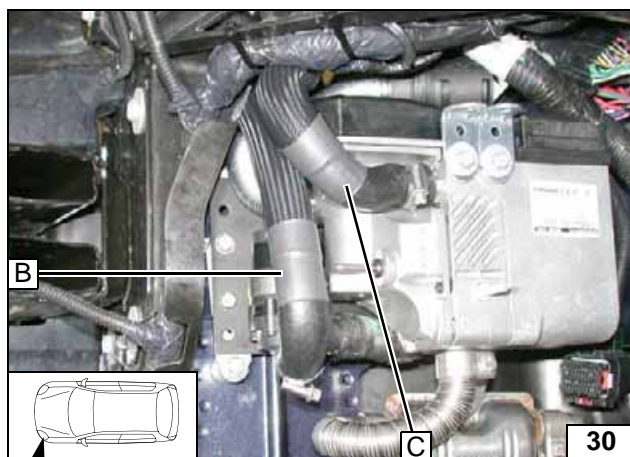


Route hose **B** and **C** under original vehicle wiring harness into engine compartment.


**Connect-
ing heater**

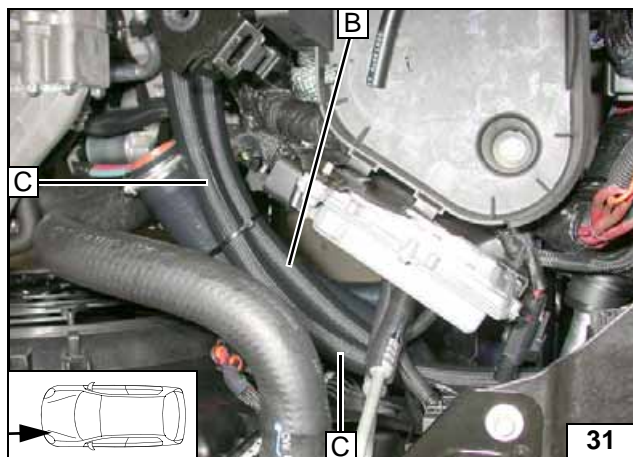

Routing in engine compartment

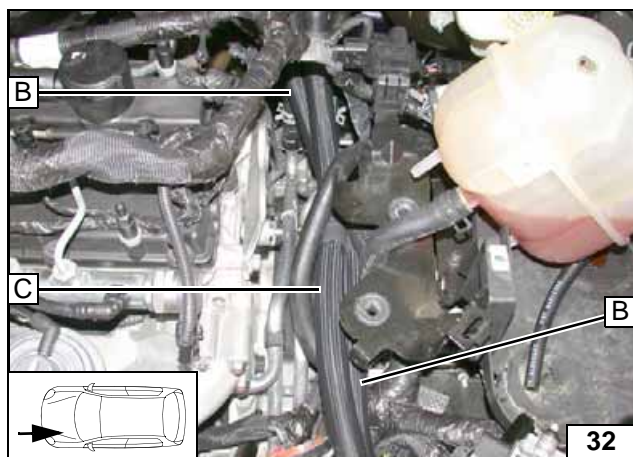


Routing in engine compartment

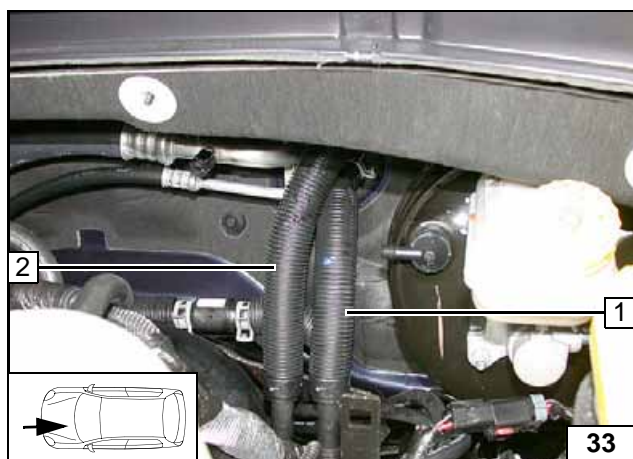

Remove protective hoses on hose on engine outlet 2 and heat exchanger inlet 1.




Cutting point

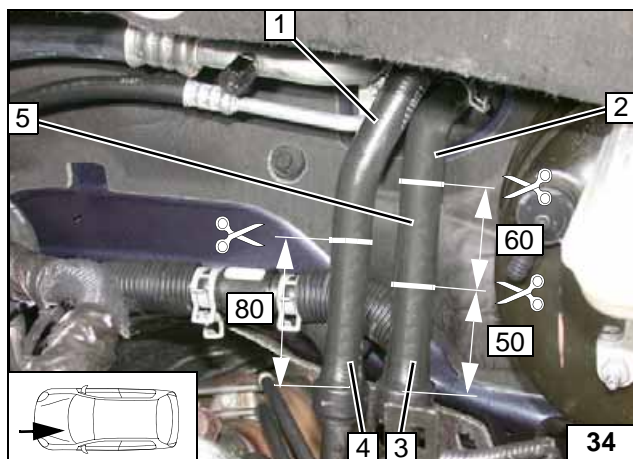

- 1 Hose section heat exchanger outlet
- 2 Hose section heat exchanger inlet
- 3 Hose section engine outlet
- 4 Hose section engine inlet
- 5 Discard 60mm hose section


Cutting point

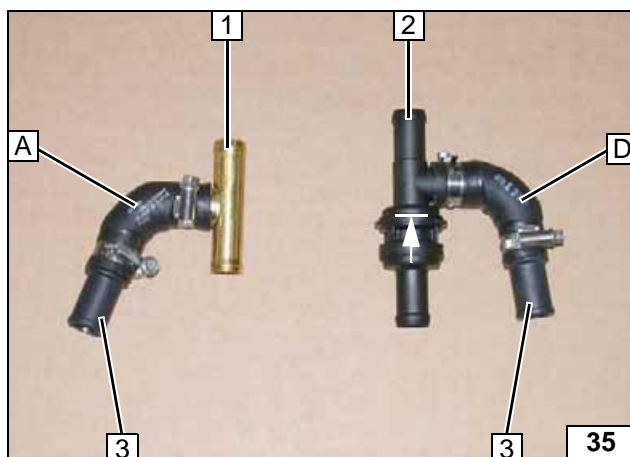

Observe direction of flow of check valve **2**.


- 1 T-piece
- 3 18x20mm connecting pipe

**Preparing
hose A and
D**

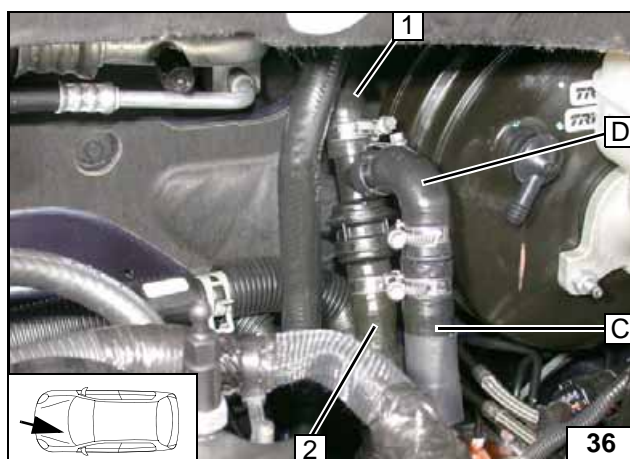

- 1 Hose of heat exchanger inlet
- 2 Hose of engine outlet

**Connect-
ing engine
outlet**

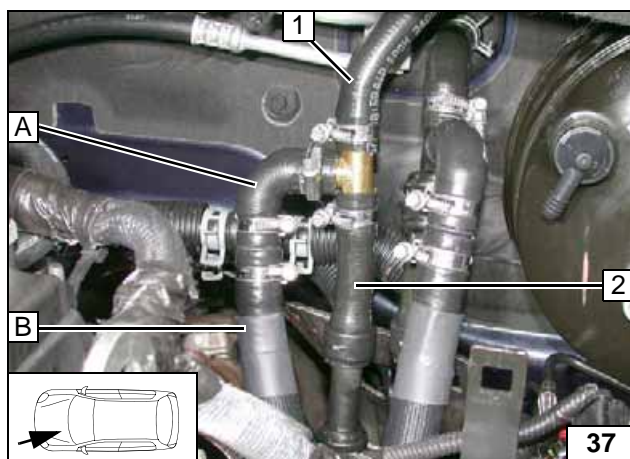

Fill coolant hoses with coolant. Ensure sufficient distance to neighbouring components.

- 1 Hose of heat exchanger outlet
- 2 Hose of engine inlet

**Conne-
ction of heat
exchanger
inlet**



Fuel

CAUTION!

Open the vehicle's fuel tank cap, ventilate the tank and then re-close the tank lock.


Catch any fuel running off with an appropriate container.

Install fuel line and metering pump wiring harness so that they are protected against stone impact. Unless specified otherwise, always fasten using cable ties.

Mount the fuel line and wiring harness with rub protection on sharp edges.

WARNING!


The fuel line and wiring harness are routed to the metering pump as shown in the wiring harness routing diagram.

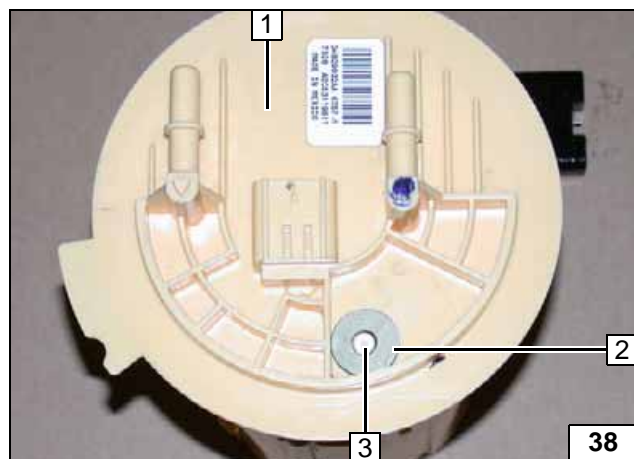


Remove fuel tank. Remove fuel tank sending unit 1 in accordance with manufacturer's instructions.

Place large diameter washer 2 on bars.

3 Copy hole pattern, 6mm dia. hole

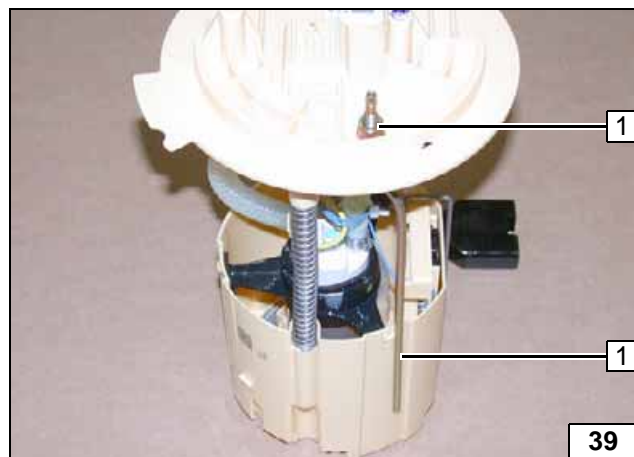

Shape fuel standpipe 1 according to template, cut to length and install.

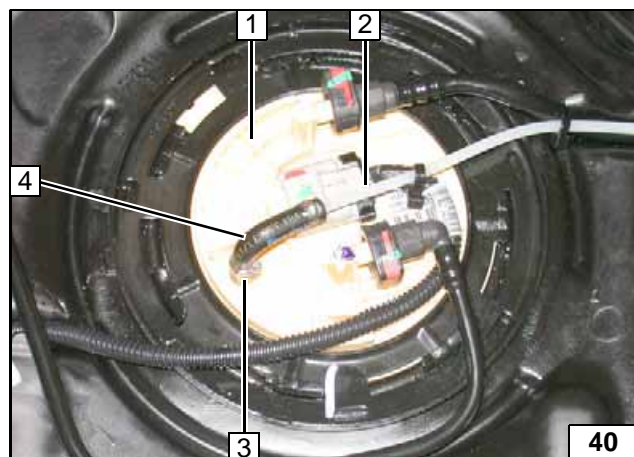

Install fuel-tank sending unit 1 in accordance with manufacturer's instructions. Cut 1000mm off fuel line 2.

3 Fuel standpipe

4 3.5x4.5mm dia. hose section 8mm dia. clamp, 10mm dia. clamp





Fuel extraction



Installing fuel standpipe




Connecting fuel line

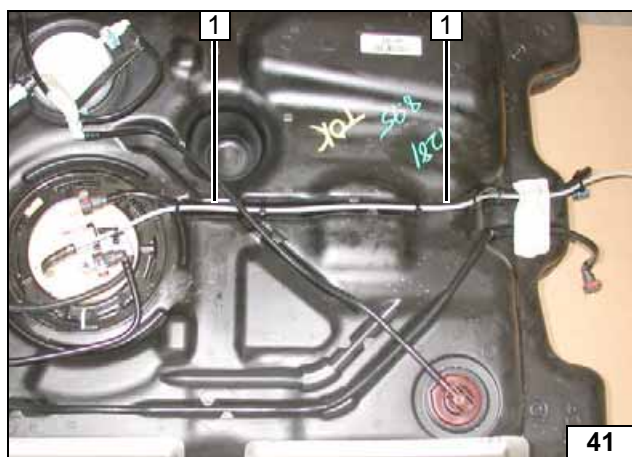

Fasten fuel line 1 to original vehicle fuel line using cable ties.


**Routing
fuel line**

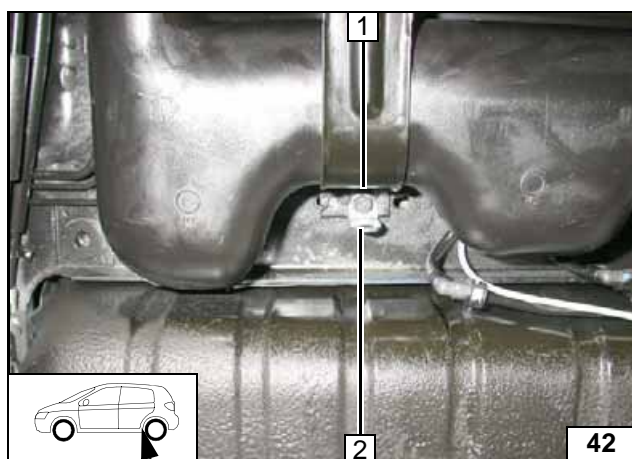

Drill out angle bracket 2 at position 1 to 10.5mm dia.


- 1 Original vehicle bolt of tank mount

**Installing
angle
bracket**

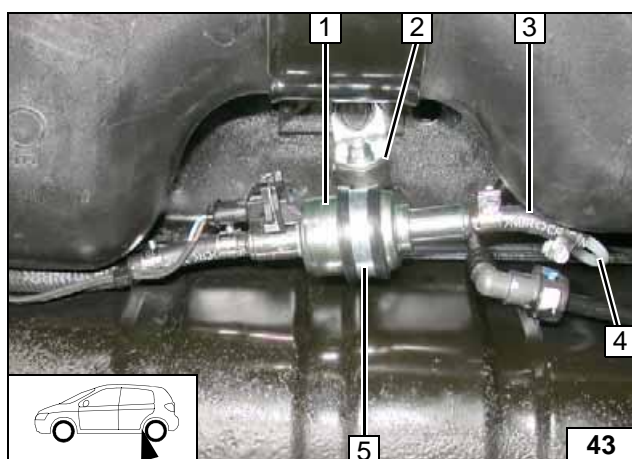

- 1 Metering pump
- 2 Silent block, flanged nut [2x]
- 3 Hose section, 10mm dia. clamp [2x]
- 4 Fuel line of fuel standpipe
- 5 Rubber-coated pipe clamp

**Mounting
metering
pump**

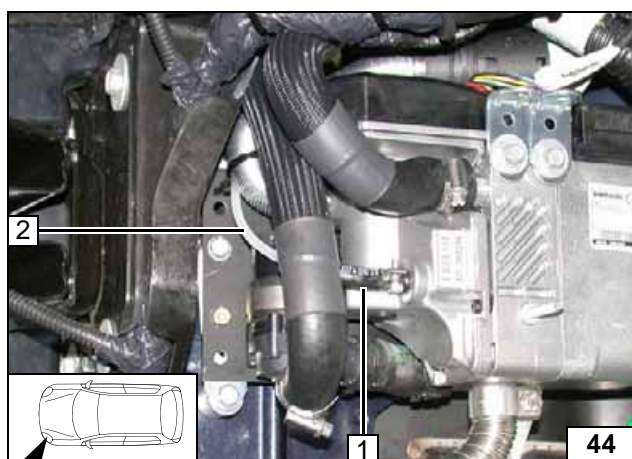


- 1 Hose section, 10mm dia. clamp [2x]
- 2 Fuel line

**Connect-
ing heater**



1 Fuel line, metering pump wiring harness


Installing lines

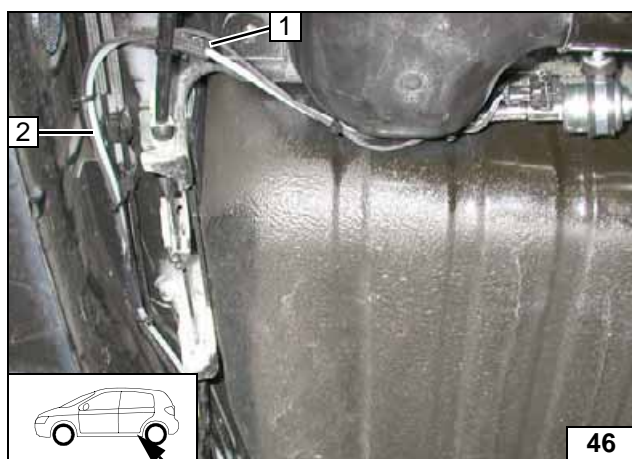

Slide fuel hose 1 onto fuel line as rub protection.

2 Fuel line, metering pump wiring harness

Installing lines

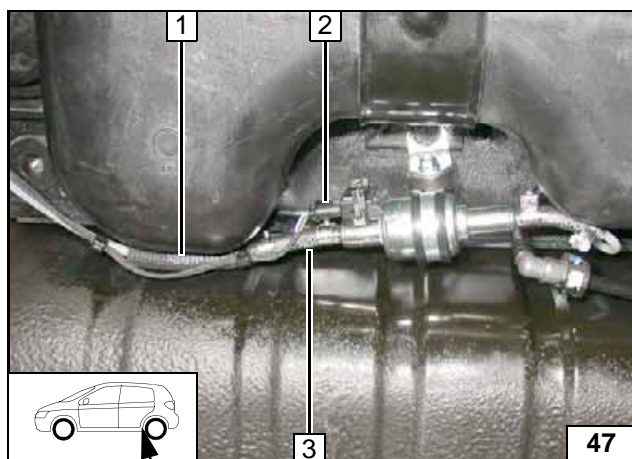


Slide fuel hose 1 onto fuel line as rub protection.

Check the position of the components; adjust if necessary. Check that they have freedom of movement.

- 2 Metering pump wiring harness, connector mounted
- 3 Fuel line, hose section, 10mm dia. clamp [2x]

Connect-
ing meter-
ing pump



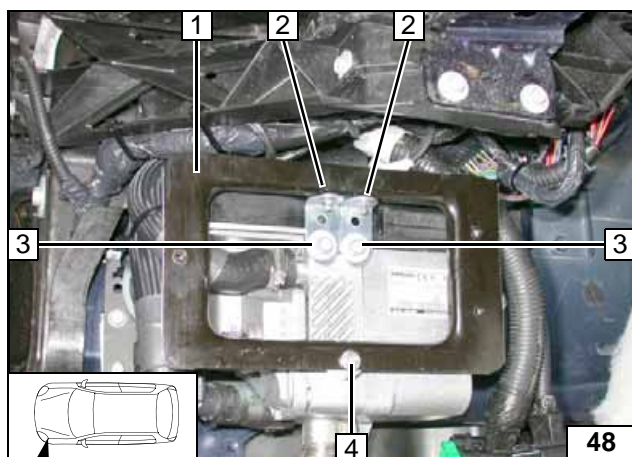

Installing Control Unit

Tighten Eject screws at position **3** [2x].


- 1 Control unit bracket
- 2 M5x16 bolt, flanged nut [2x each]
- 4 Eject stud, 20mm shim, flanged nut

Installing control unit bracket



Mount control unit **1** with original vehicle bolts on bracket and complete with connector.

Installing control unit

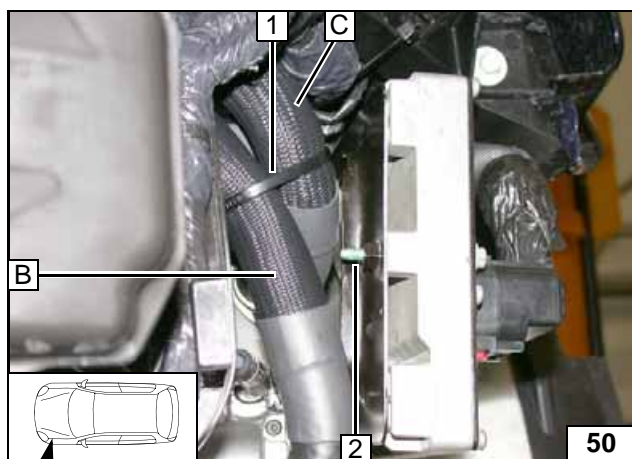

Ensure sufficient distance to adjacent components; shorten bolt at position **2** if necessary.

- 1 Cable tie

Fixing hoses B and C in place





Final Work

WARNING!

Mount removed parts in reverse order.


Check all hoses, clamps and all electrical connections for firm seating.

Secure all loose cables using cable ties.

Only use manufacturer-approved coolant.

Spray the heater components with anti-corrosion wax (Tectyl 100K, Order No. 111329).

- Connect the battery.
- Fill and bleed the coolant circuit according to the vehicle manufacturer's specifications.
- Adjust digital timer, teach Telestart transmitter
- Make settings on A/C control panel according to the "Operating Instructions for End Customer".
- Place message signboard "Switch off parking heater before refilling" in the area of the filler neck.
- For start-up and function check, see Installation instructions

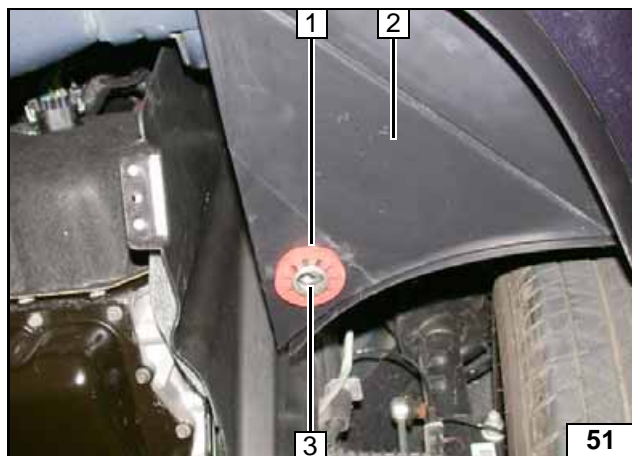

42mm dia. hole in wheel-well inner panel 2 at position 3. Align exhaust end section 3 flush on red (rt) rubber isolator 1.



Mounting
rubber iso-
lator



Fuel Standpipe Template



Operating Instructions for End Customer

Please remove page and add to the vehicle operating instructions.

Note:

We recommend matching the heating time to the driving time.

Heating time = driving time

Example:

For a driving time of approx. 20 min. (in one direction), we recommend not exceeding a switch-on time of 20 min.

Passenger compartment monitoring , if installed, must be deactivated in addition to the vehicle settings for the heating operation.

Instructions about deactivation can be taken from the operating instructions of the vehicle.

Before parking the vehicle, make the following settings:



- 1 Direct air outlet towards windscreen
- 2 Set temperature on both sides to "HI"
- 3 Switch off rear ventilation

**Automatic
air-condi-
tioning**

