

Thermo Top C Additional Heater e1 00 0002

Installation Instructions

Chevrolet Captiva

3.2 Gasoline

from Model Year 2006

Left-hand drive vehicle

Automatic transmission



WARNING!

Hazard warning:

Incorrect installation or repair of Webasto heating systems may cause a fire or result in the emission of carbon monoxide, which can be fatal. Serious or fatal injuries can be caused as a result.

Specialist company training, technical documentation, specialized tools and equipment are required to install and repair Webasto heating and cooling systems.

NEVER attempt to install or repair Webasto heating or cooling systems if you have not successfully completed the company training and thereby acquired the required technical skills, or if you do not have access to the required technical documentation, tools and equipment needed to carry out correct installation and repairs.

ALWAYS follow all Webasto installation and repair instructions and observe all warnings.

Webasto does not accept any liability for defects and damage that are attributable to installation by untrained staff.

Table of Contents

Validity	2	Preparing heater unit	12
Heater Unit/Installation Kit	3	Preparing installation location	14
Foreword	3	Installing heater unit	16
General Instructions	3	Coolant connection	17
Special Tools	3	Fuel Connection	20
Explanatory Notes on Document	4	Combustion air	22
Preliminary Work	5	Exhaust system	23
Heater unit installation location	5	Final Work	26
Electrical Connections	6	Operating Instructions for End Customer	27
Fan controller for manual air conditioning	7		
Automatic air-conditioning fan controller	8		
Remote option (Telestart)	11		

Validity

Manufacturer	Model	Type	EG-BE No./ABE
GM Daewoo	Chevrolet Captiva	KLAC	e4 * 2001 / 116 * 0113

Engine type	Engine model	Output in kW	Displacement in cm ³
10HM	Gasoline	169	3195

Vehicle and engine types, equipment variants and national specifications not listed in these installation instructions have not been tested. However, installation according to these installation instructions may be possible.

The installation location of a digital timer and summer/winter switch should be confirmed with the end customer before installation.

Heater Unit/Installation Kit

Quantity	Description	Order No.:
1	Retail accessories with desired heater control	See price list
1	Installation kit for Chevrolet Captiva	9017037A
1	Additional kit for Chevrolet Captiva 3.2 liter Gasoline	1311850A

Also required with automatic air-conditioning:

Quantity	Description	Order No.:
1	Kit for Chevrolet Captiva with Automatic Air-Conditioning	9017052B

Foreword

These installation instructions apply to Chevrolet Captiva vehicles with a 3.2 Gasoline engine and a manual transmission

- for validity, see page 2 - from model year 2006 and later, assuming technical modifications to the vehicle do not affect installation, any liability claims excluded. Depending on the vehicle version and equipment, modifications may be necessary during installation with respect to these installation instructions.

However, the stipulations in the "installation instructions" and "operating and maintenance instructions" for the *Thermo Top C/P/E* must always be observed.

The corresponding rules of technology and any information from the vehicle manufacturer should be observed during the installation work.

General Instructions

Installation should be carried out according to the general, standard rules of technology. Unless specified otherwise, fasten hoses, lines and wiring harnesses to original vehicle lines and wiring harnesses using cable ties.

Sharp edges should be fitted with edge protectors (split-open plastic hose).

Spray unfinished body areas, e.g. drilled holes, with anti-corrosion wax (Tectyl 100K, Order No. 111329).

Special Tools

- Torque wrench for 2.0 - 10 Nm
- Hose clamping pliers
- Metric Thread-Setter Kit

Explanatory Notes on Document

To provide you with a quick overview of the individual working steps, you will find an identification mark on the outside top right corner of the page in question.

Mechanical system



Electrical system




Coolant connection



Fuel connection



Exhaust system



Combustion air



Special features are highlighted using the following symbols:



Specific risk of injury or fatal accidents.



Specific risk of damage to components.





Specific risk of fire or explosion.



Reference to general installation instructions of Webasto components or to the manufacturer's vehicle-specific documents.



Reference to a special technical feature.




The arrow in the vehicle icon indicates the position on the vehicle and the viewing angle.

Preliminary Work

WARNING!

- Disconnect the battery "earth" or "ground" connection.
- Depressurize the cooling system.
- Copy the factory number from the original type label to the duplicate type label.
- Remove years that do not apply from the duplicate label.
- Attach the duplicate label (type label) in the appropriate place.
- Completely remove the battery
- Remove the fuse and relay box
- Remove the engine cover
- Remove the engine control unit
- Disconnect the power-steering fluid reservoir
- Disconnect the expansion tank
- Remove the charge-air tube between the air filter and the turbocharger
- Disconnect the air hose from the charge-air tube to the engine at the engine
- Remove the filler neck of the window washer system
- Remove the vent line at the top to the coolant expansion tank
- Open the fuel tank cap, ventilate the tank.
- Close the tank cap again.
- Remove the underride protection
- Open the left tank mounting service lid
- Remove the glove compartment

Remove page 27 "Operating Instructions for End Customer" and add to the vehicle operating instructions.

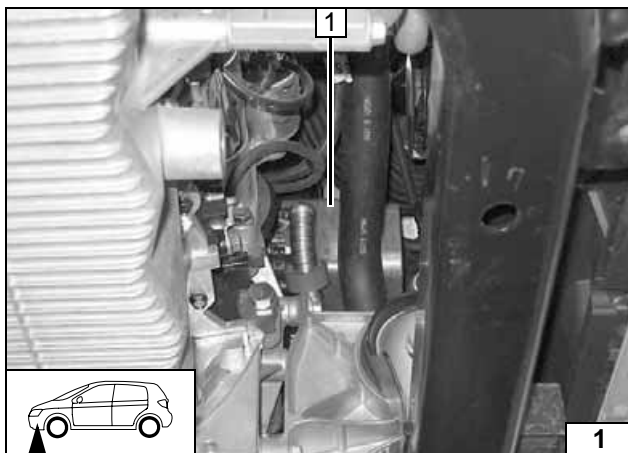

Heater unit installation location

- 1 Heater unit

Installation location




Electrical Connections





Wiring harness pass through

- 1 Protective rubber plug

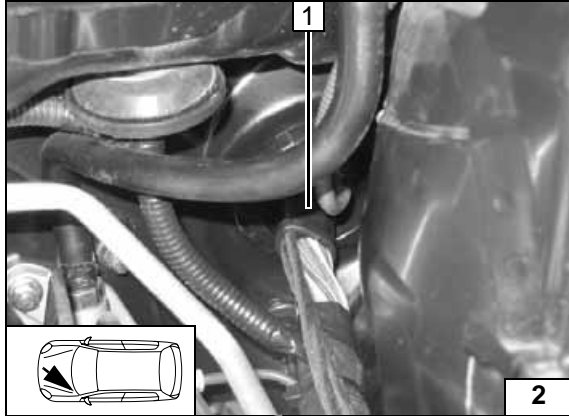


Digital timer

- 1 Digital timer

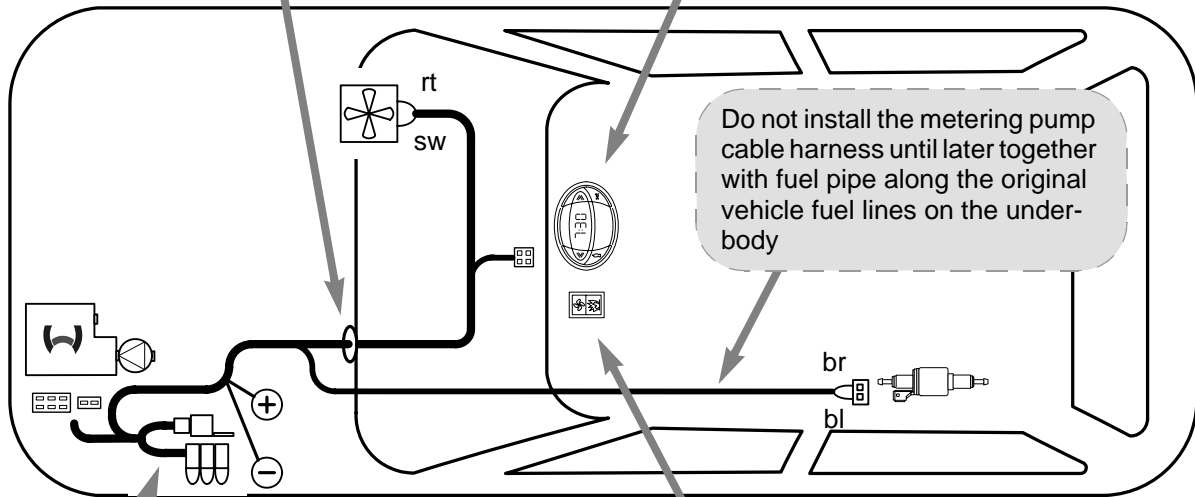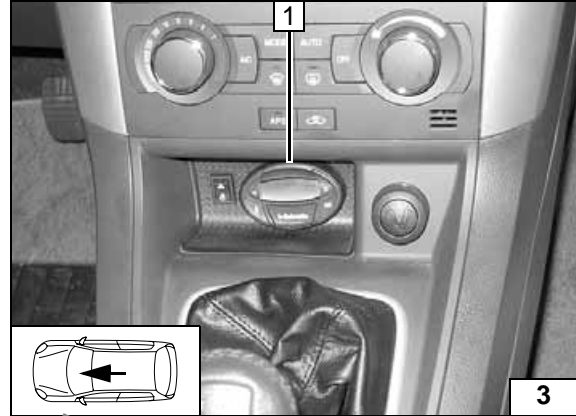


Wiring harness installation diagram

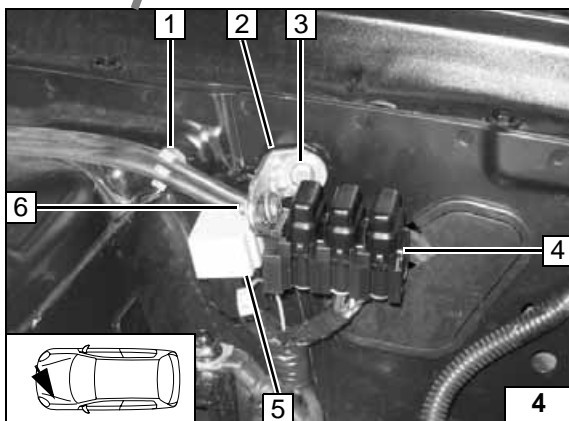

Fuse holder, K3 relay

- 1 Move original vehicle clip
- 2 Angle bracket
- 3 Drill out hole to 9 mm dia., mount M6 rivet nut, M6x20 bolt, spring lockwasher
- 4 Fuse holder
- 5 K3 relay
- 6 Align M5x16 bolt, large diameter washer, M5 flanged nut to right in oblong hole

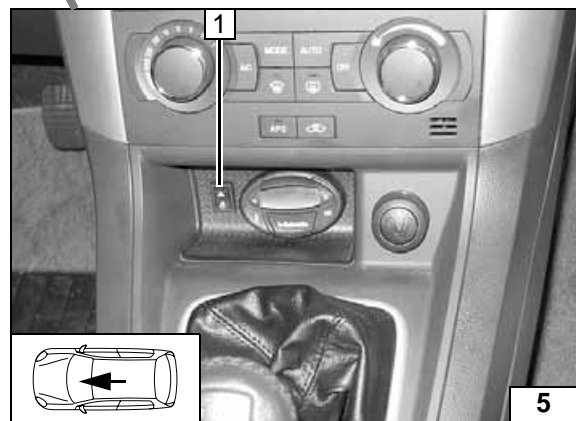


Summer/winter switch option

- 1 Summer/winter switch, drilled hole 12 mm dia.




Fan controller for manual air conditioning

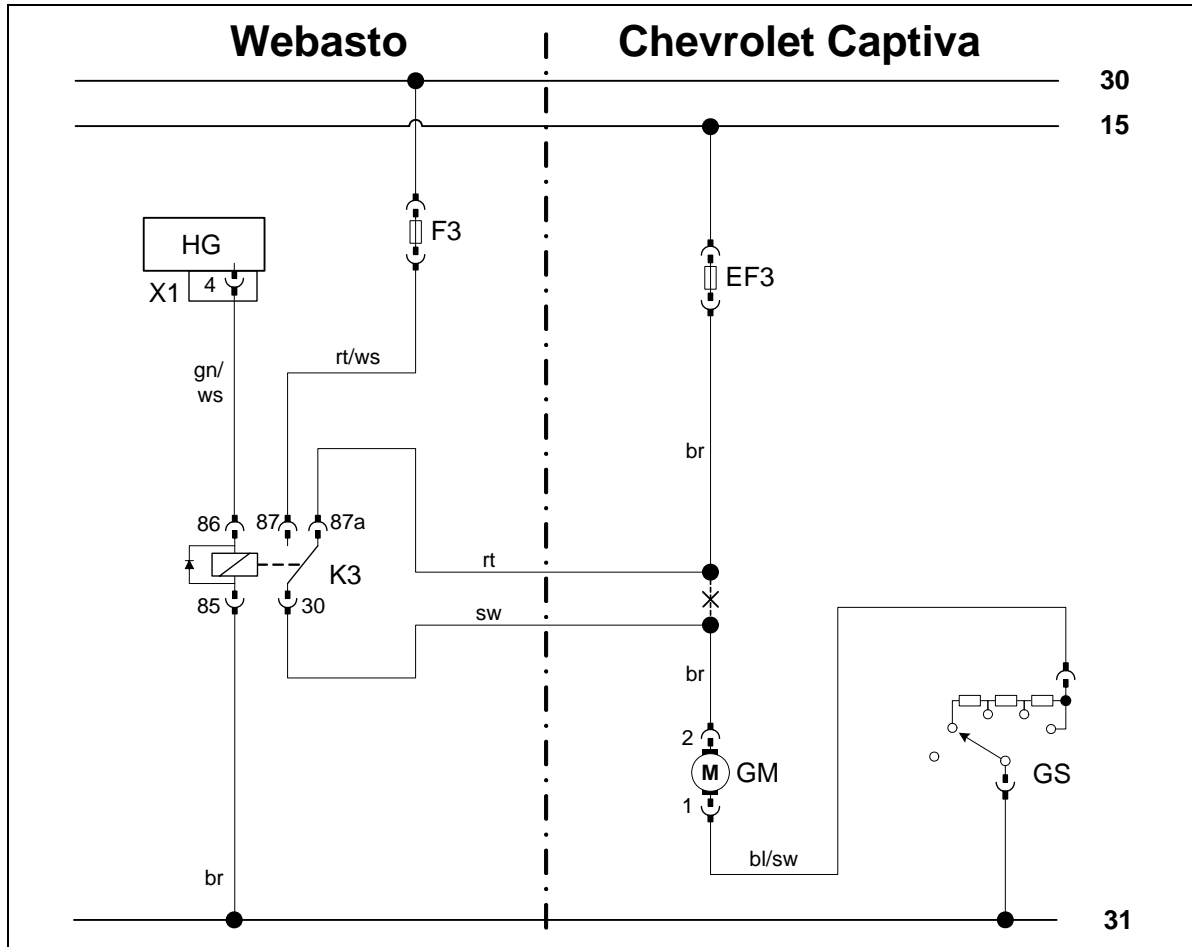

Wiring diagram for manual air conditioning

Webasto components		Components of Chevrolet Captiva		Colors and symbols	
HG	Heater unit TT-C/E	GM	Fan motor	rt	red
X1	6-pin connector	GS	Fan switch	ws	white
F3	Fuse, 25 A	EF3	40 A fan fuse	sw	black
K3	Fan relay			br	brown
				gn	green
				bl	blue
				X	Cutting point
				Wiring colors may vary.	

Legend

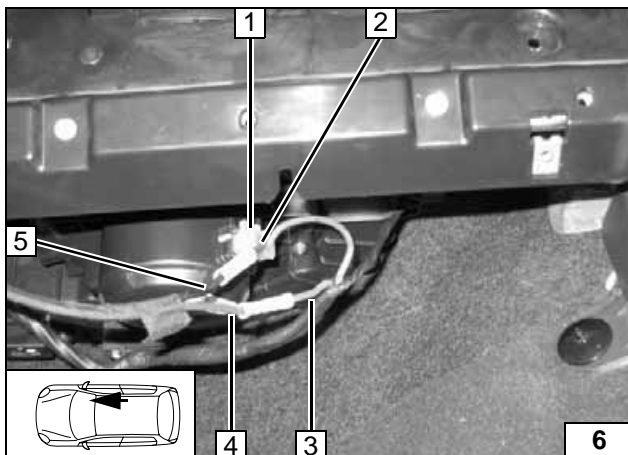

Connection to 2-pin connector 1 from fan motor.


Make connections as shown in the wiring diagram with the connectors provided.

- 2 Brown (br) wire to connector
- 3 Brown (br) wire from fuse block
- 4 Red (rt) wire to K3/87a
- 5 Black (sw) wire from K3/30

Connecting fan motor




Automatic air-conditioning fan controller

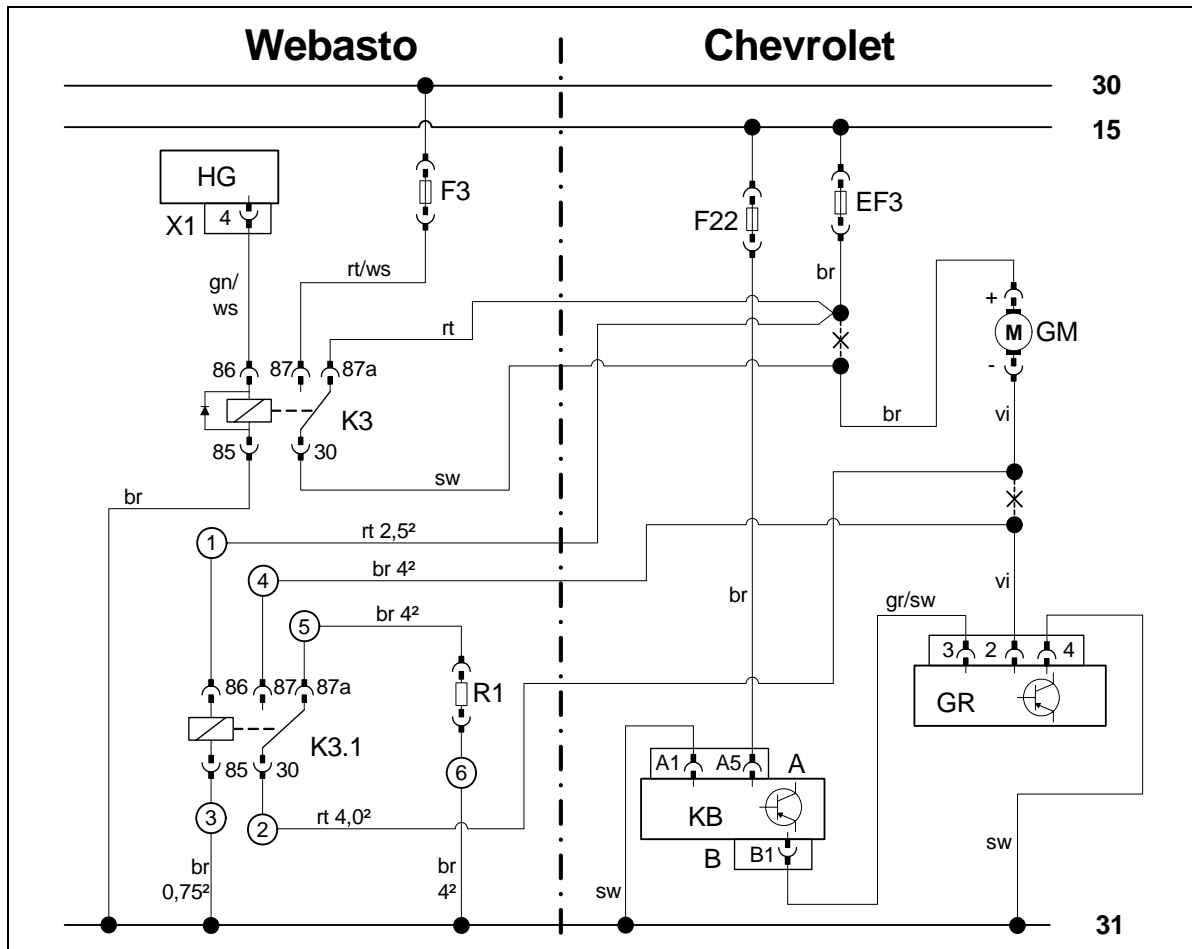

Automatic air-conditioning circuit diagram

Webasto components		Components of Chevrolet Captiva		Colors and symbols	
HG	Heater unit TT-C/E	GM	Fan motor	rt	red
X1	6-pin heater unit connector	GR	Fan controller	ws	white
F3	Fuse, 25 A	KB	Air-conditioning control element	sw	black
K3	Fan relay	F22	Fuse 10A	br	brown
K3.1	Additional relay	EF3	Fuse 40A	gn	green
R1	0.9 ohm resistor	A	Connector for A/C control panel	bl	blue
		B	Connector for A/C control panel	GR	gray
				vi	violet
				X	Cutting point
				Wiring colors may vary.	

Legend

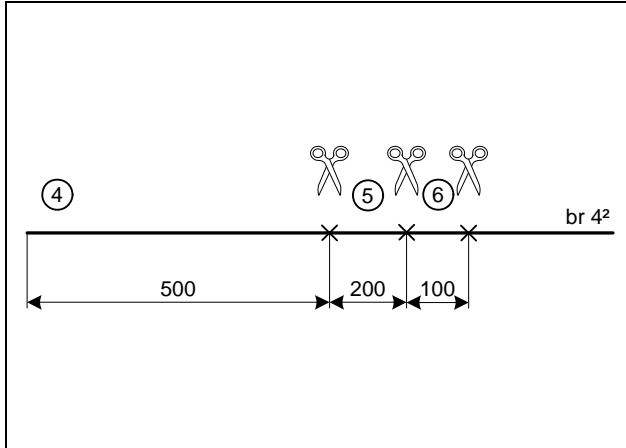


Preparing electrical system

Produce connections as shown in wiring diagram.

Crimp cable lug onto brown (br) wire ③ 0.75² provided and onto brown (br) wire section ⑥ 4².



Cutting brown (br) wire to length

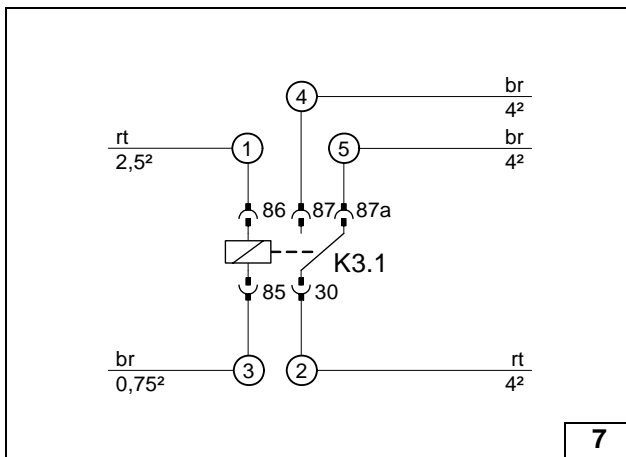


Produce connections as shown in wiring diagram.

Pull wires ①, ② and ④ in protective sleeving provided.



Preparing additional relay K3.1

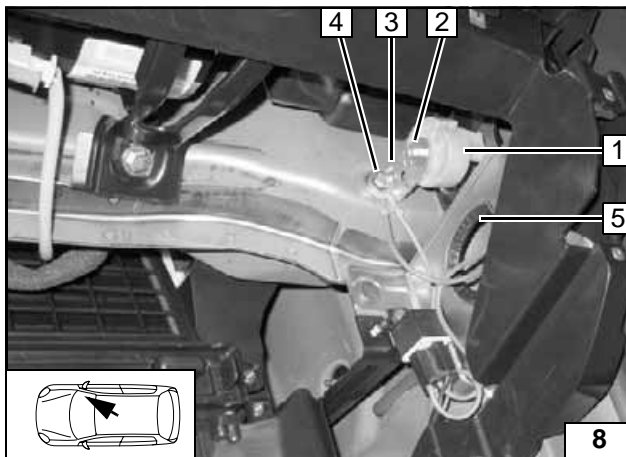


Installing components

Resistor 1 becomes hot!
Ensure sufficient spacing (at least 20 mm) to neighboring components.

- 3 M5x30 cap screw, large diameter washer, nut [2x]
- 2 Angle bracket
- 1 M6x20 bolt, spring lockwasher, brown (br) ground wires ③ 0.75² and ⑥ br 4² on existing threaded hole
- 5 Mount edge protection



Installing resistor and additional relay

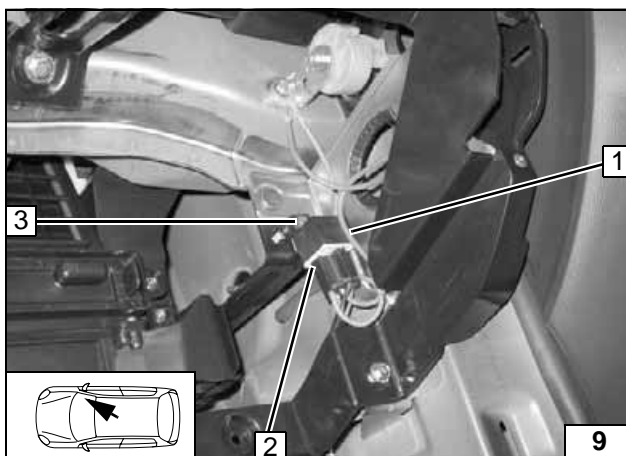


Produce connections as shown in wiring diagram.

- 1 Brown (br) wire ⑤ 4² from K3/87a to resistor
- 2 Additional relay K3.1
- 3 M5x16 bolt, flanged nut on existing hole



Connecting resistor and additional relay

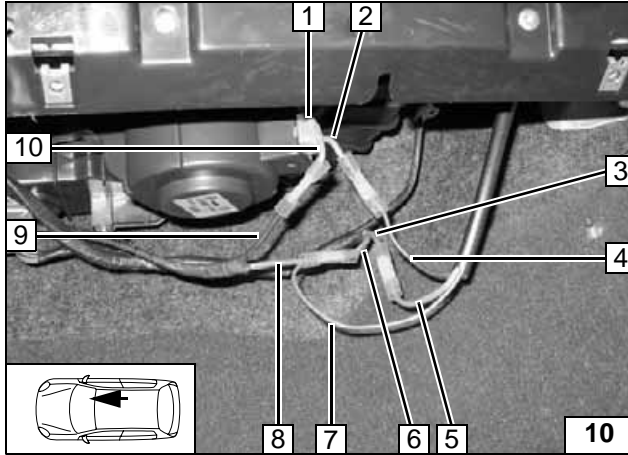


Connection to 2-pin connector **1** from fan motor.
Produce connections as shown in wiring diagram (crimp and shrink).

- 2** Violet (vi) wire from connector
- 3** Violet (vi) wire to fan controller
- 4** Red (rt) wire ② 4² from K3.1/30
- 5** Brown (br) wire ④ 4² from K3.1/87
- 6** Brown (br) wire from fuse EF3
- 7** Red (rt) wire ① 2.5² from K3.1/86
- 8** Red (rt) wire to K3/87a
- 9** Black (sw) wire from K3/30
- 10** Brown (br) wire to connector




**Connect-
ing fan mo-
tor**

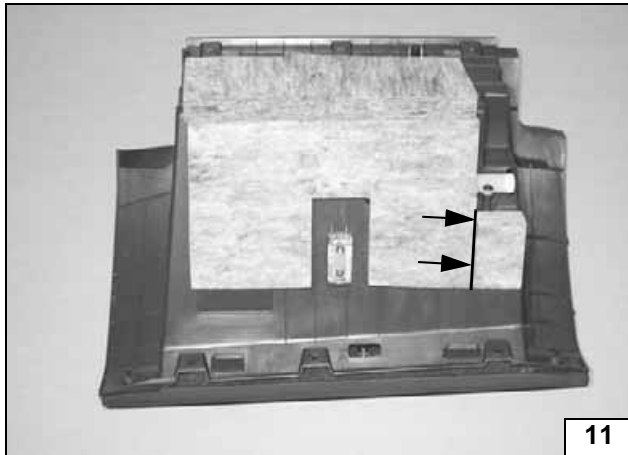

Cut away **insulation** of glove compartment at marking.



**Cutting
away insu-
lation**

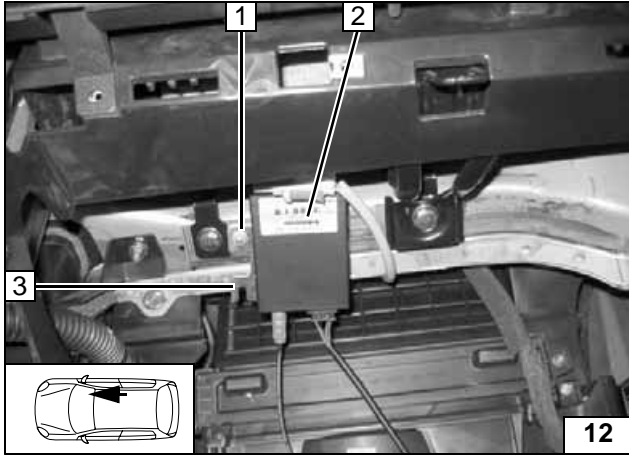


Remote option (Telestart)

- 1 Existing hole, M5x16 bolt, washer, flanged nut
- 2 Receiver
- 3 Telestart bracket




Installing receiver

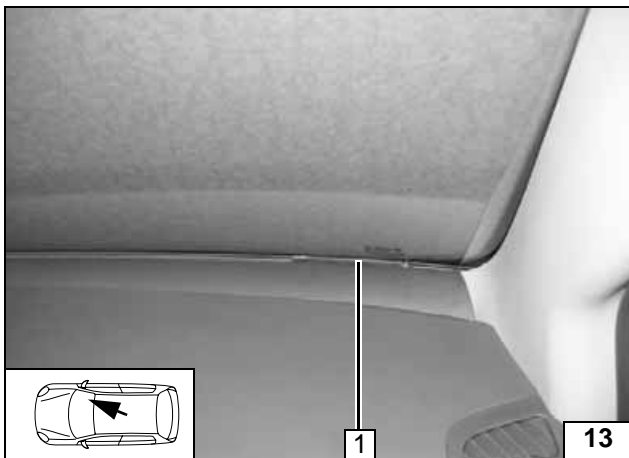

- 1 Antenna



Installing antenna

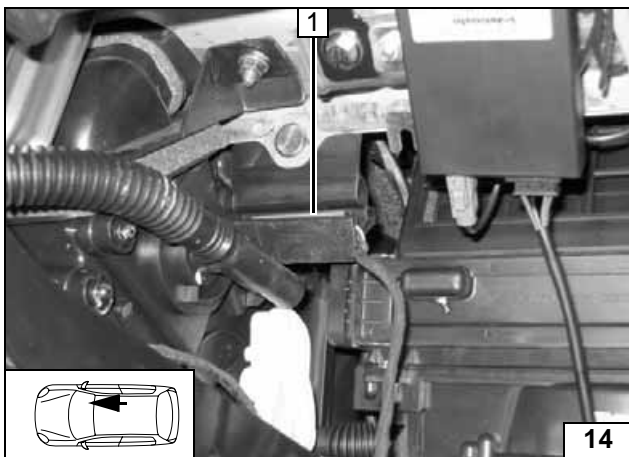

Temperature sensor for HTM100 only

- 1 Fasten temperature sensor with suitable means (double-sided adhesive tape)

Installing temperature sensor

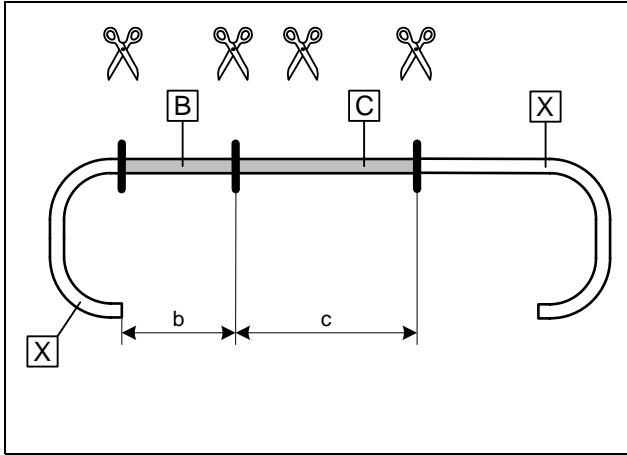


Preparing heater unit

b = 240 mm
c = 335 mm

Discard section X




Cutting coolant hoses to length

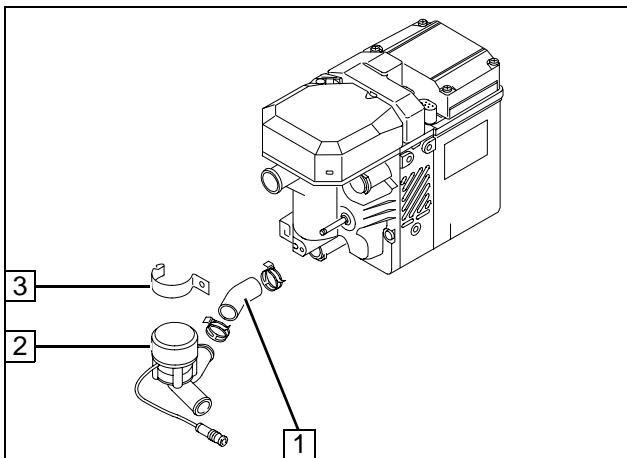

Remove water pump **2** from heater unit. Hose section **1** and spring clip will be reused. Discard retaining clip **3** and bolt.




Removing water pump

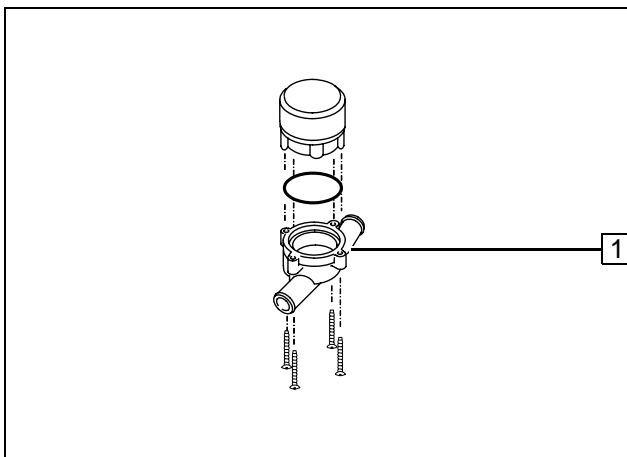

Replace 193° lid **1**.



Replacing pump lid


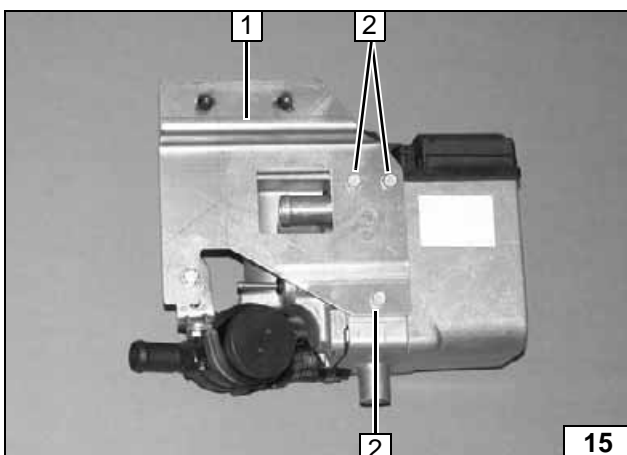


Ejot screw **2** [3x], tightening torque 10 Nm!

1 Bracket part 1




Preassembling bracket 1 on heater unit

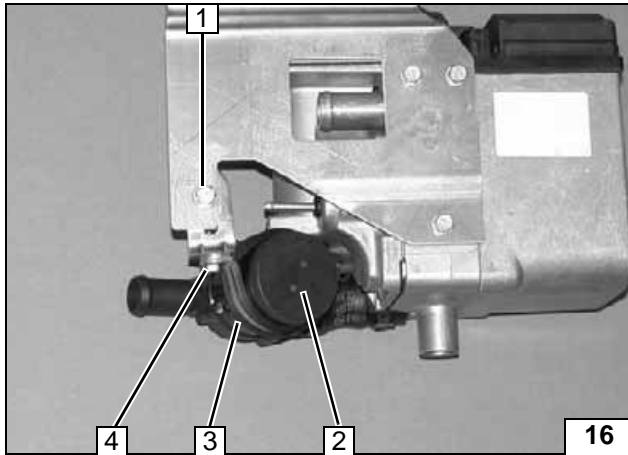

- 1 M6x20 bolt, angle bracket, M6 flanged nut
- 2 Water pump
- 3 Rubber-coated pipe clamp, 48 mm dia.
- 4 M6x12 bolt, flanged nut M6

Preassembling water pump


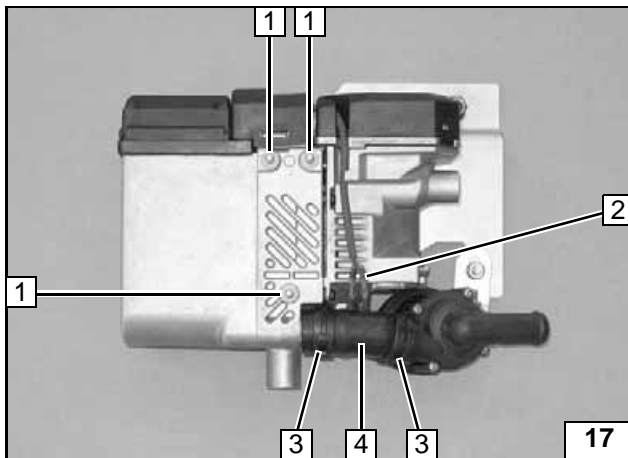


Eject screw 1 [3x], tightening torque 10 Nm!
Connect adapter wire for water pump 2, cut to length and connect identical colors to wiring harness of water pump using connectors.

- 3 Existing spring clip [2x]
- 4 Existing hose section




Preassembling heater unit

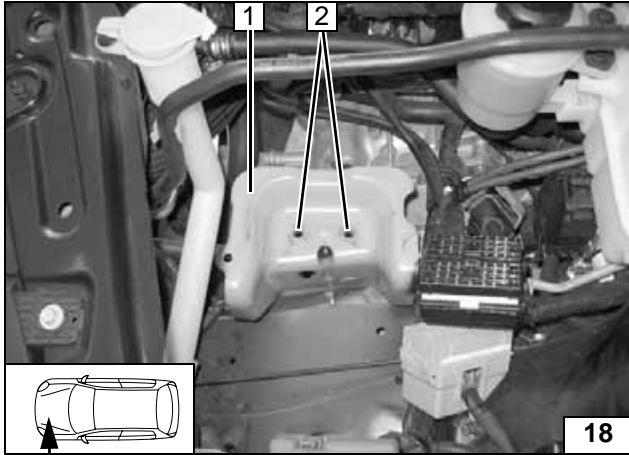

Preparing installation location

- 1 Cross member for battery carrier
- 2 Drill out thread to 10 mm dia. [2x]

Drilling out thread

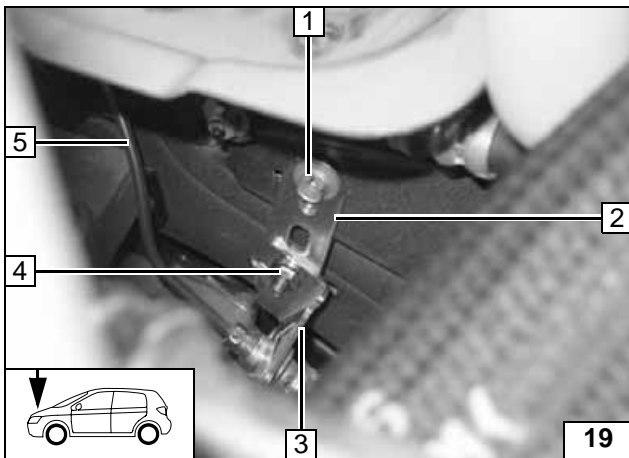


Remove bracket 3 of hydraulic line 5 and mount as shown (depending on equipment). Original vehicle bolt 1 will be reused



- 2 Perforated bracket
- 3 M6x16 bolt, M6 flanged nut


Repositioning hydraulic line

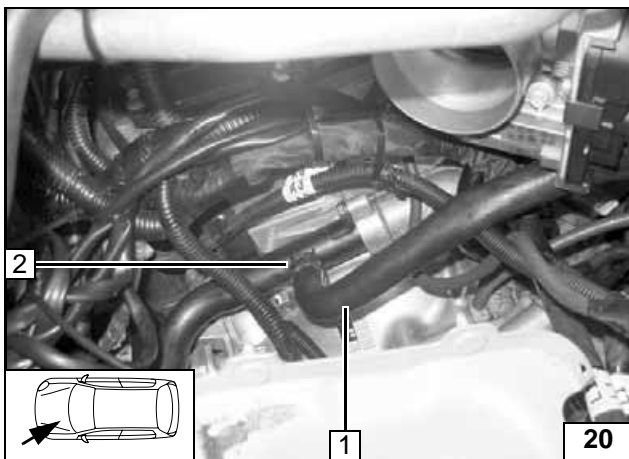

Remove original vehicle hose 1. Spring clip 2 will be reused.





Removing hose

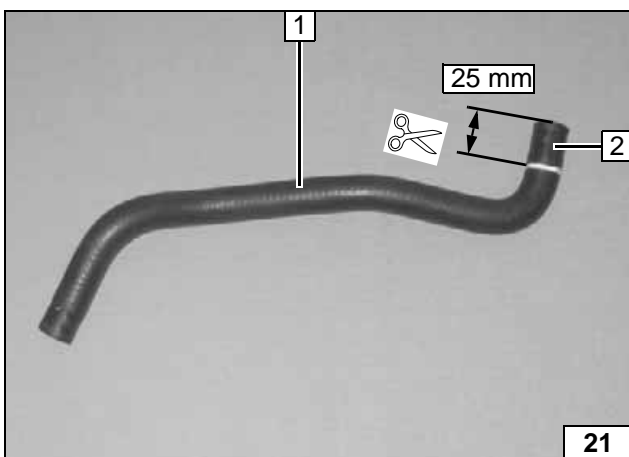

Shorten original vehicle hose 1. Dispose of hose section 2.




Separating hose

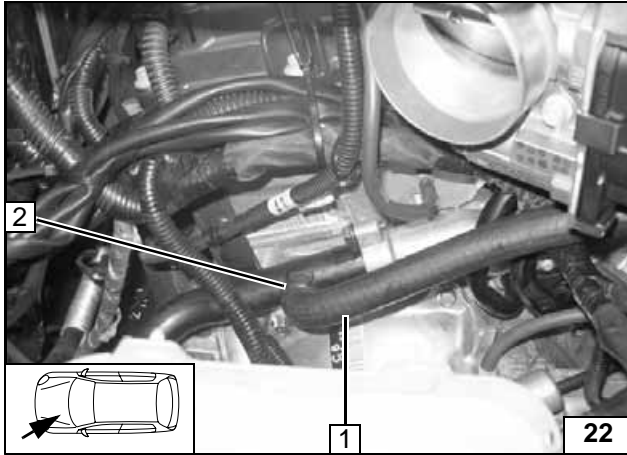

- 1 Original vehicle hose
- 2 Original vehicle spring clip


Remounting hose

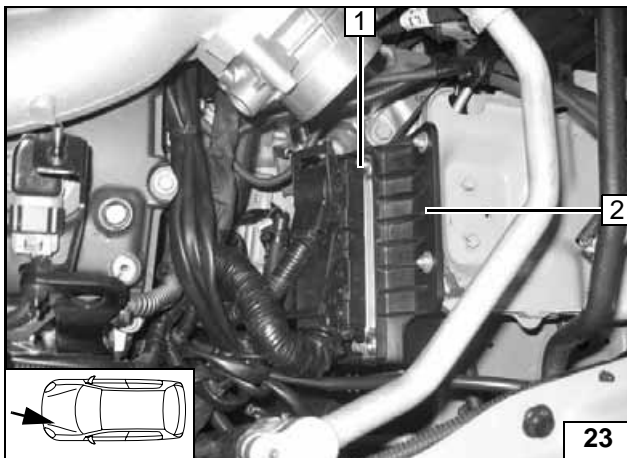

- 1 Completely remove control unit 1 with bracket
- 2. Discard bracket 2.




Removing control unit

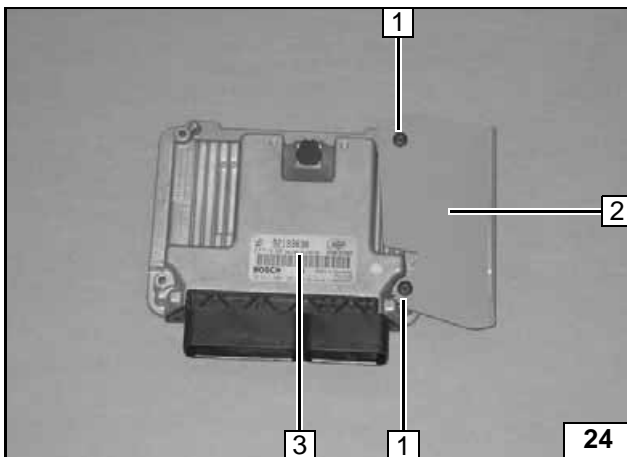

- 1 Self-tapping Torx screw [2x]
- 2 Additional bracket
- 3 Control unit



Preassembling control unit

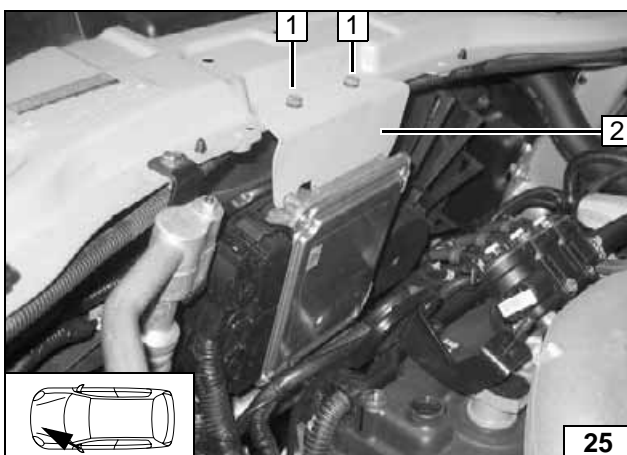

- 1 M6x20 bolt, spring lockwasher [2x each] on existing threaded holes
- 2 Additional bracket with control unit



Installing control unit

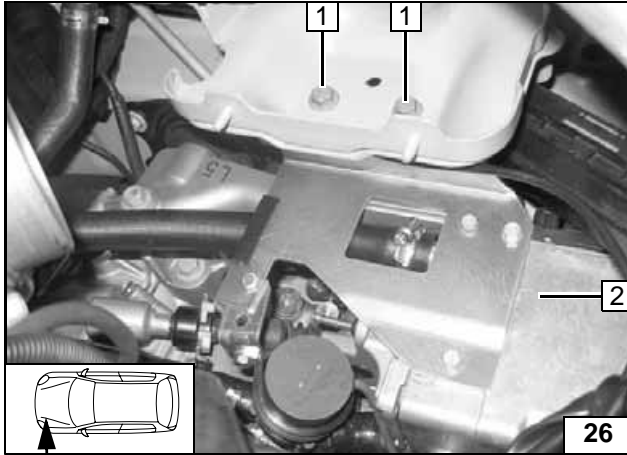


Installing heater unit

- 1 Loosely mount M8x30 bolt [2x]
- 2 Preassembled heater unit




Installing heater unit

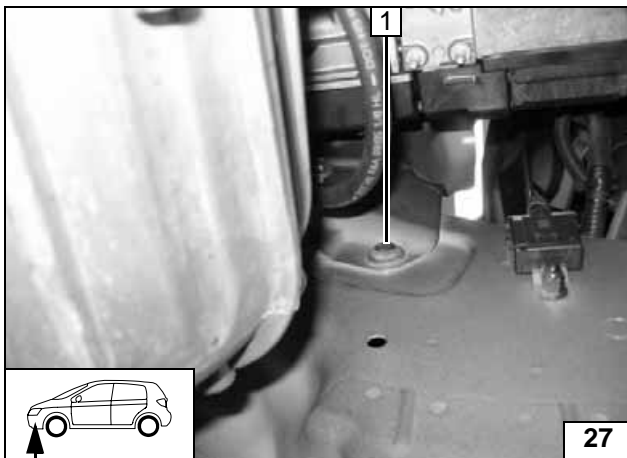

Remove original vehicle screw 1 and discard.




Removing screw

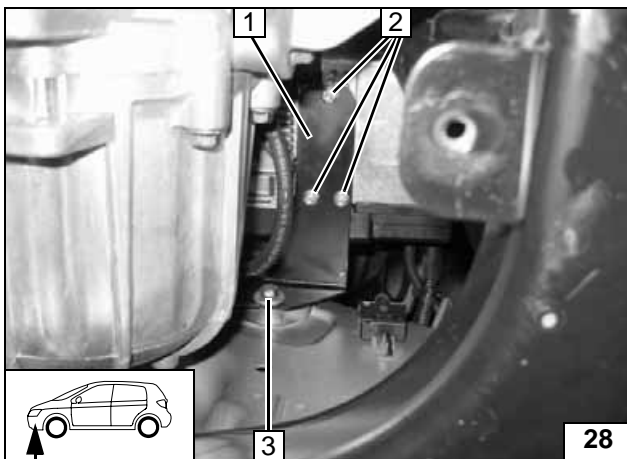

- 1 Bracket part 2
- 2 M6 flanged nut [3x]
- 3 M8x40 bolt, spring lockwasher, large diameter washer



Installing bracket

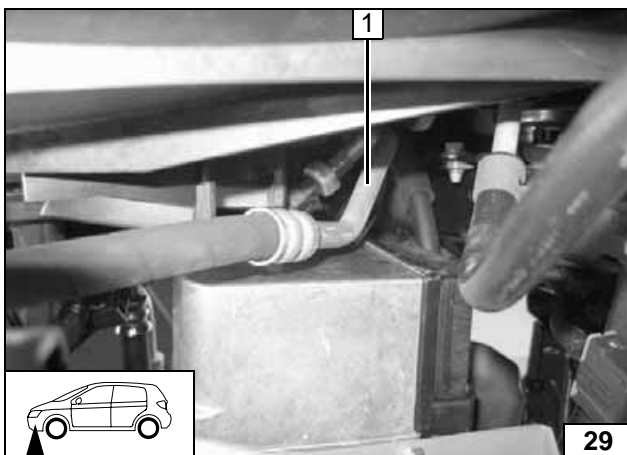

Ensure sufficient spacing to neighboring components, especially to A/C line 1; **correct if necessary.**



Aligning heater unit



Coolant connection


WARNING!

Tighten all hose clamps to 2.0 + 0.5 Nm.

Any coolant running off should be collected using an appropriate container!


Install hoses so that they are kink-free. Unless specified otherwise, always fasten using cable ties. Position hose clamps and spring band clamps so that no other hose can be damaged.

The connection should be "inline" based on the following diagram:

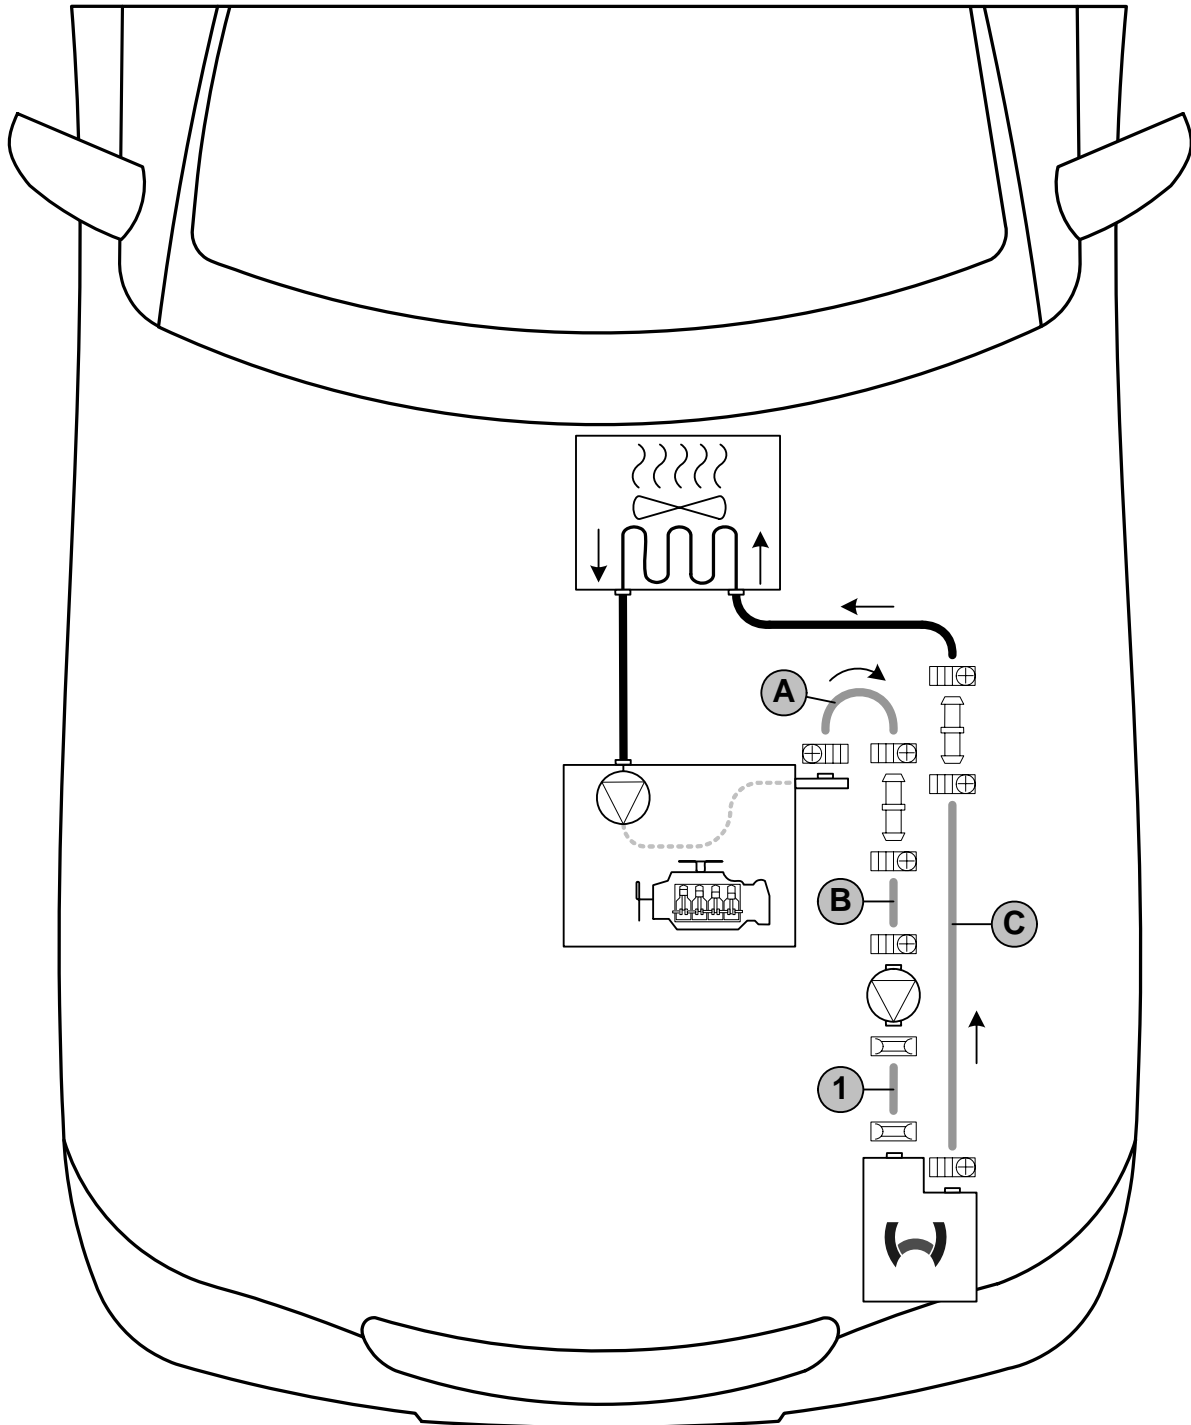


Coolant routing diagram

All spring clips  = 27 mm dia.! All connecting pipes  = Ø 18x20.

All hose clamps  = 20-27 mm dia.! 1 = Hose section between circulating pump and heater unit

A = 180° molded hose, 18 mm dia.!




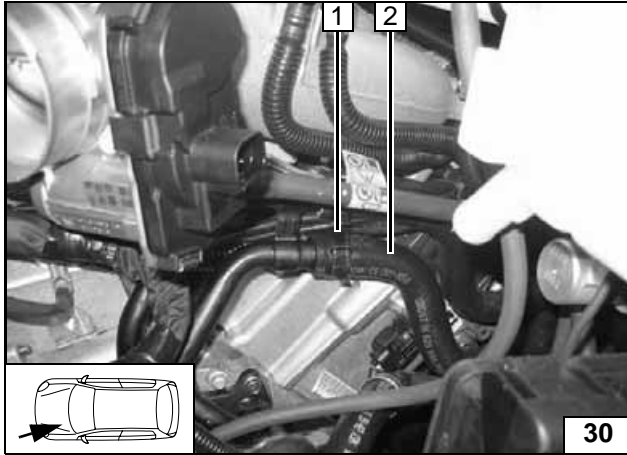

Disconnect hose to engine outlet/heat exchanger inlet 2 at connection piece of engine outlet. Discard spring clip 1.




Cutting point

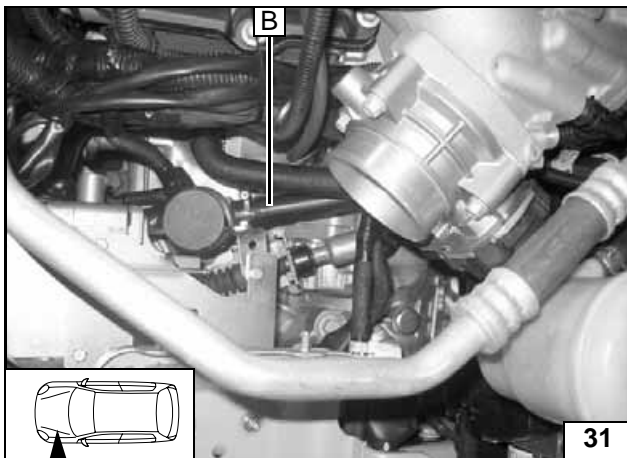

When installing the coolant hose, ensure sufficient spacing to the vehicle gear shift mechanism.



Connection to heater unit inlet

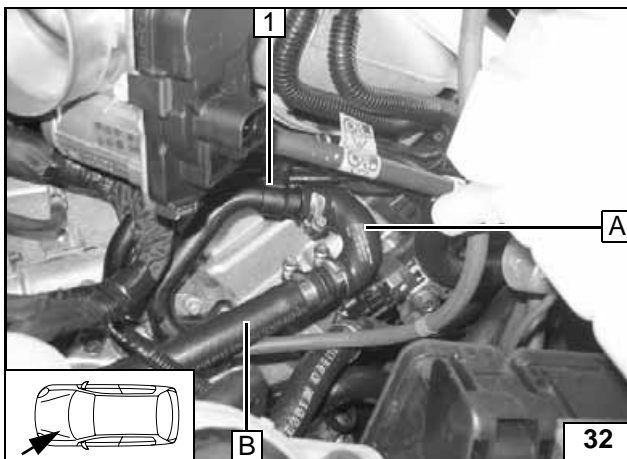


Hose A = 180° elbow provided.

1 Connection piece for engine outlet




Connection to engine outlet

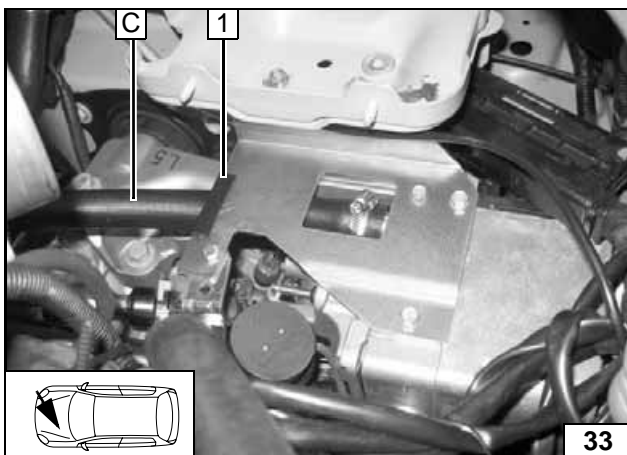

1 Edge protection

Connection to heater unit outlet

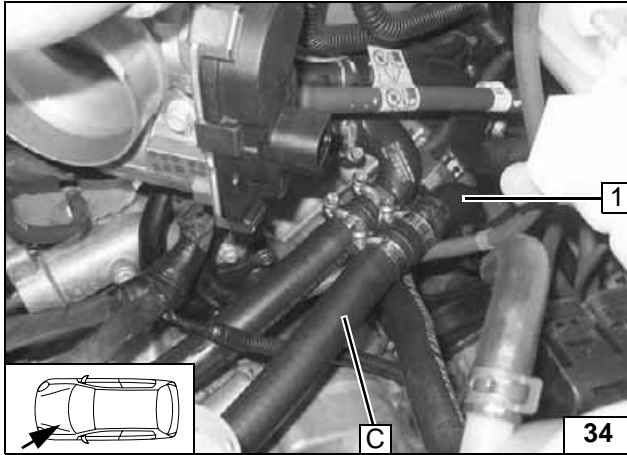


Before connecting, fill the coolant hoses with coolant.



1 Hose section of heat exchanger inlet

**Connec-
tion to heat
exchanger
inlet**

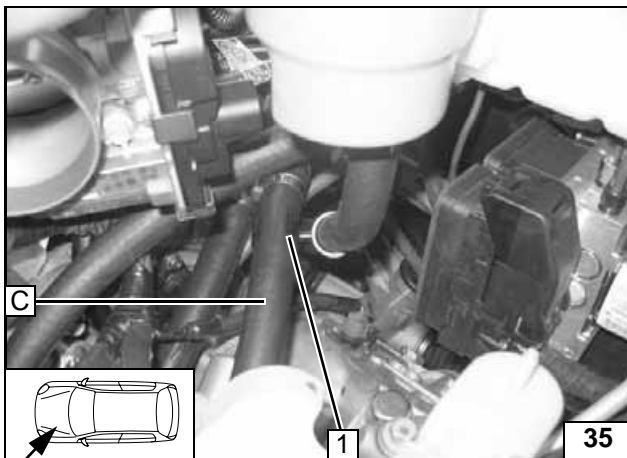

1 Spacer bracket

**Installing
spacer
bracket**



Fuel Connection

CAUTION!

Open the vehicle's fuel tank cap, ventilate the tank and then re-close the tank lock.


Catch any fuel running off with an appropriate container.

Install fuel line and metering-pump wiring harness so that they are protected against stone impact. Unless specified otherwise, always fasten using cable ties.

Mount the fuel line and wiring harness with rub protection on sharp edges.


WARNING!

The fuel line and wiring harness are routed to the metering pump in as shown in the wiring harness routing diagram.

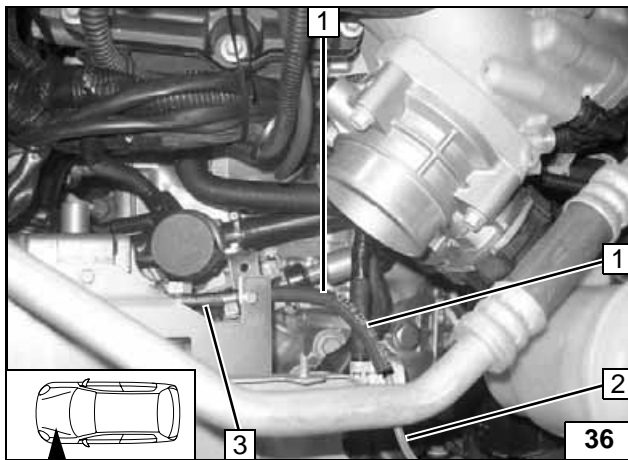


- 1 Included hose section as scuff guard [2x]
- 2 Mecanyl fuel line
- 3 Hose section, 10 mm dia. hose clamp [2x]

Conne-
tion on
heater unit

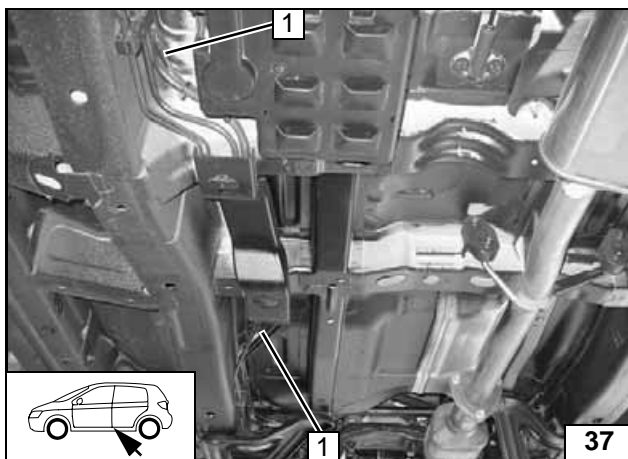

- 1 Mecanyl fuel pipe and metering pump cable harness

Installing
lines

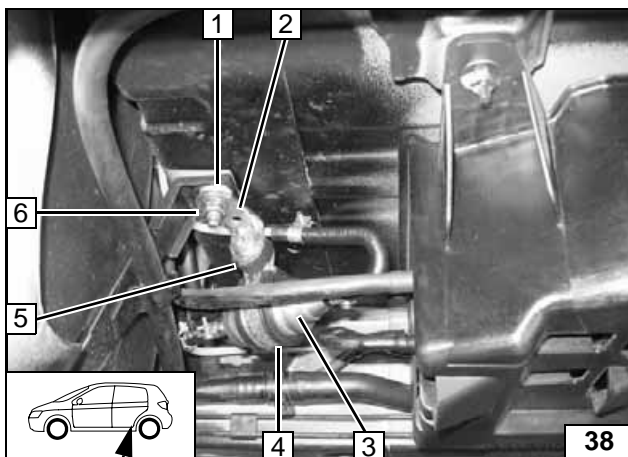


Ensure proper installation position of metering pump **3**, see "Installation Instructions". Installation location in front of vehicle fuel tank!

- 1 5 mm shim
- 2 Angle bracket
- 4 Rubber-coated pipe clamp
- 5 Silent block, flanged nut [2x]
- 6 Original vehicle bolt



Installa-
tion loca-
tion of
metering
pump

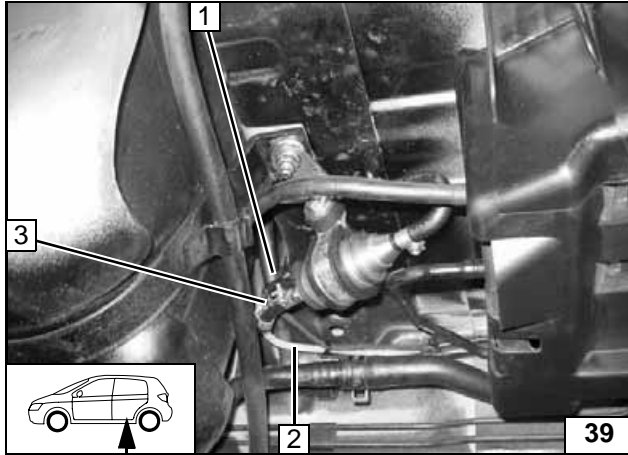


Connect fuel line **2** from heater unit to pressure side of metering pump [side with connector].

- 1 Wiring harness of metering pump, connector mounted
- 3 Hose section, 10 mm dia. hose clamps [2x].




Installing metering pump

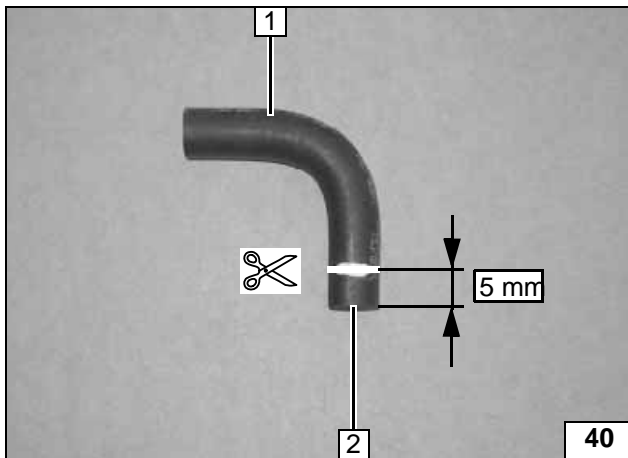

- 1 Separate 90° molded hose at marking
- 2 Discard section

Preparing fuel standpipe

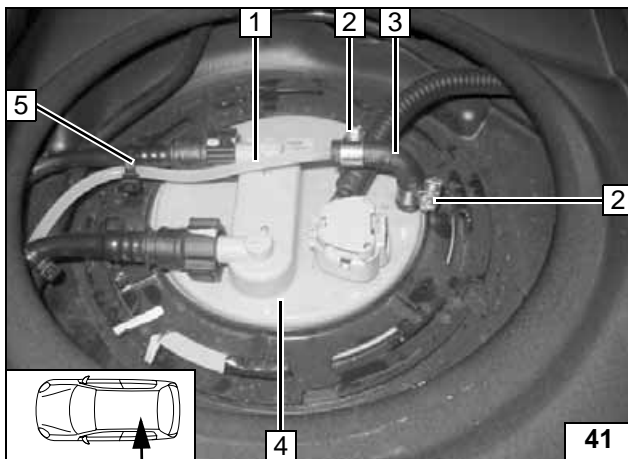


Cut closure off existing removal connection piece and push on short end of 90° molded hose **3**.

- 1 Fuel line
- 2 10 mm dia. hose clamp [2x]
- 4 Fuel sender
- 5 Cable tie



Removing fuel


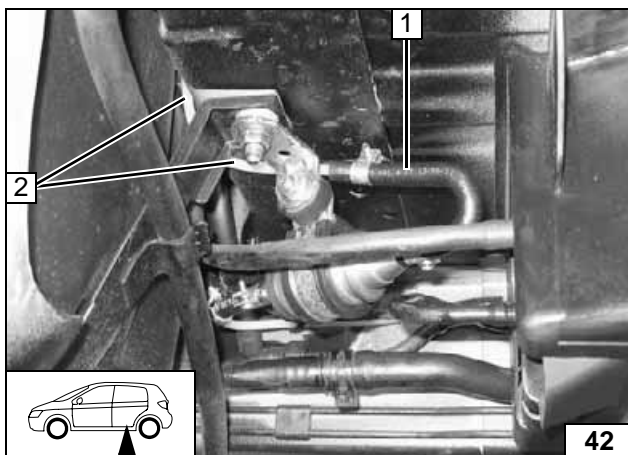


Fuel line **2** from fuel standpipe on intake side of metering pump [side without connector]. Check the position of the components; adjust if necessary. Check that they have free clearance.

- 1 180° molded hose, 10 mm dia. hose clamp [2x]




Connection to metering pump

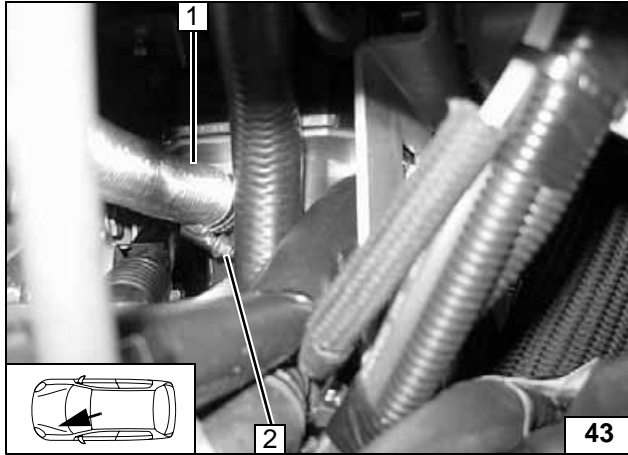

Combustion air


- 1 Combustion air pipe
- 2 Hose clamp

Installing combustion air pipe

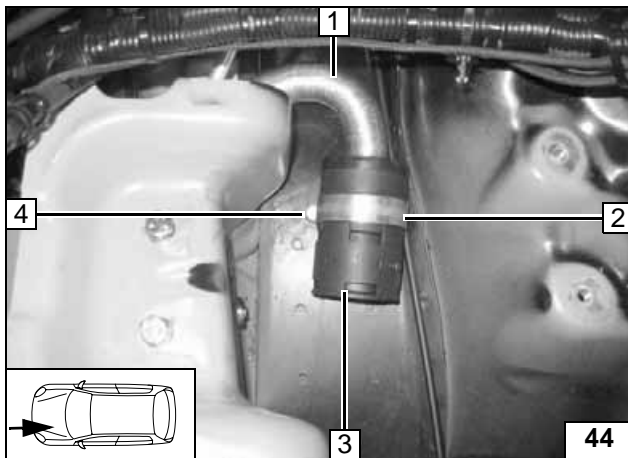

- 1 Combustion-air intake pipe
- 2 48 mm dia. p-clamp; rubber coating removed
- 3 Combustion-air intake muffler
- 4 Existing hole, M6 rivet nut, M6x20 bolt, spring lock washer

Installing muffler

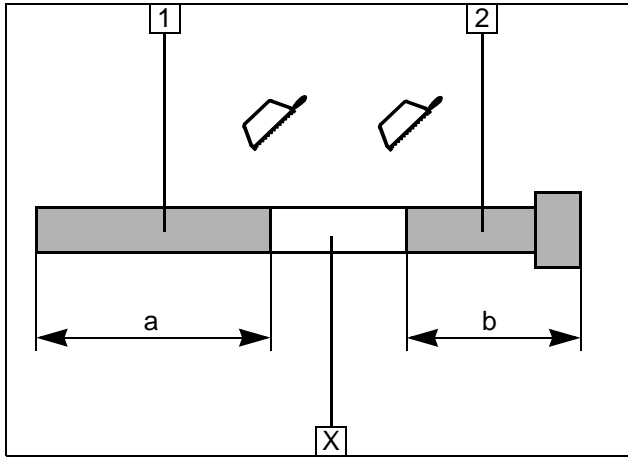


Exhaust system

- 1 Exhaust pipe
a = 460 mm
- 2 Exhaust end section
b = 230 mm

Discard section X

Preparing exhaust pipe

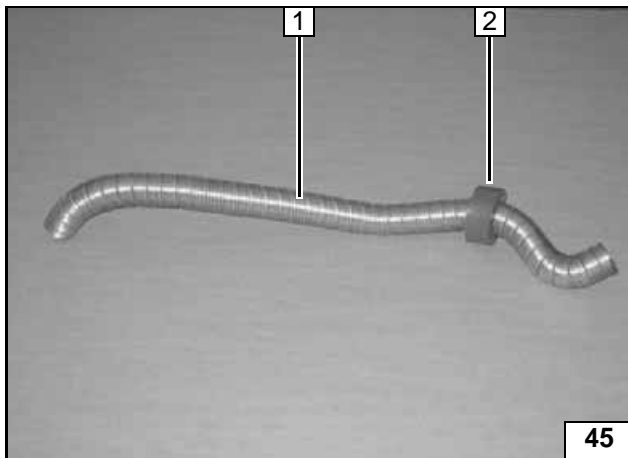


Shape exhaust pipe 1.

- 2 Red (rt) rubber isolator




Preparing exhaust pipe

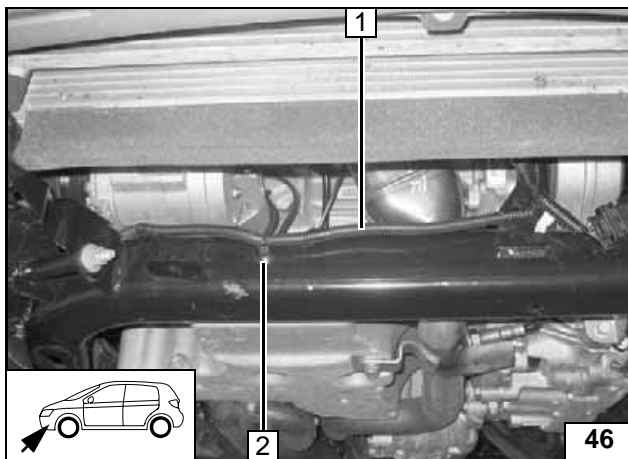

Remove clip 2 from original vehicle wiring harness 1.





Disconnecting original vehicle wiring harness

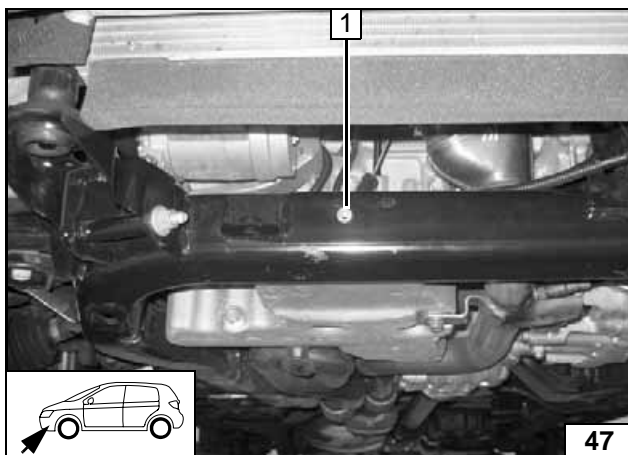

- 1 Drill out existing hole to 9.1 mm dia., mount rivet nut


Installing rivet nut

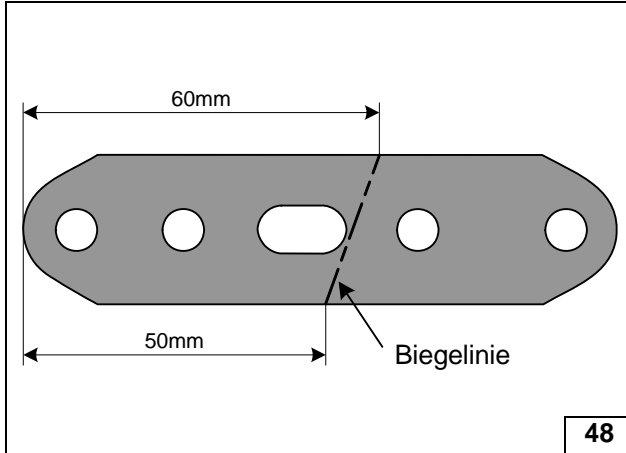

Bend perforated bracket upward by approx. 75° at bending line.



Bending perforated bracket

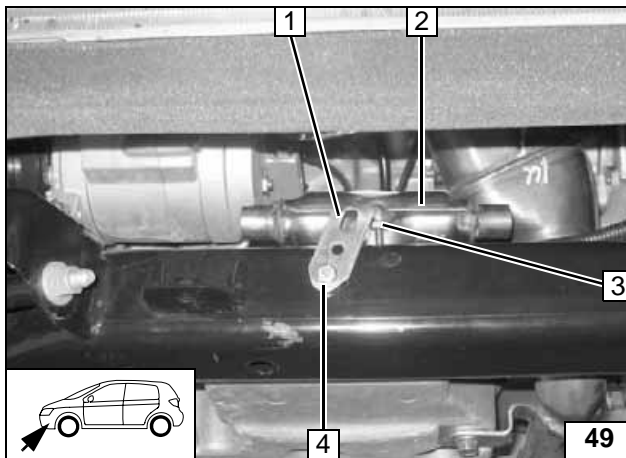


Check the position of the components; adjust if necessary. Check that they have free clearance.




- 1 Perforated bracket
- 2 Exhaust muffler
- 3 M6x20 bolt, flanged nut
- 4 M6x20 screw, spring lockwasher on rivet nut

Installing exhaust muffler

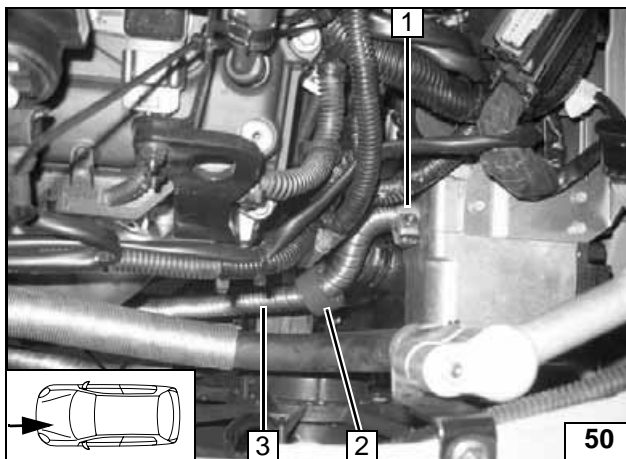



- 1 Hose clamp
- 2 Position red (rt) rubber isolator
- 3 Exhaust pipe

Installing exhaust pipe

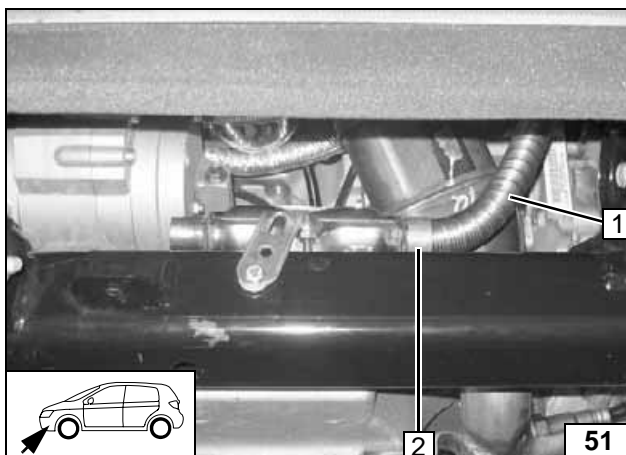

- 1 Exhaust pipe
- 2 Hose clamp

Installing exhaust pipe

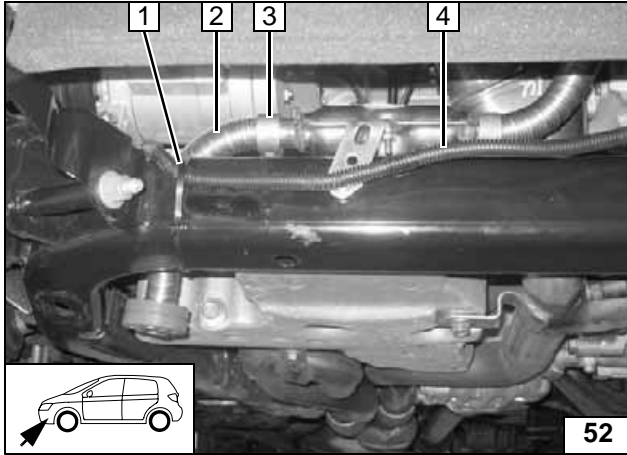


Ensure sufficient spacing to neighboring components (wiring harness to exhaust system).

- 1 Cable tie
- 2 Exhaust end section
- 3 Hose clamp
- 4 Original vehicle wiring harness




Installing exhaust end section

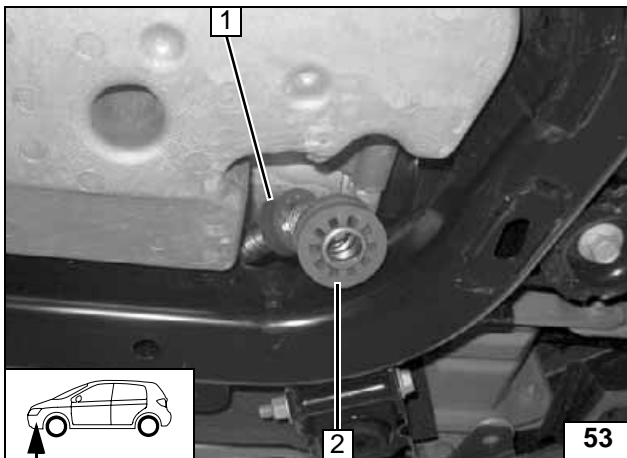

- 1 Push on red (rt) rubber isolator and position
- 2 Push on red (rt) rubber isolator with groove


Pushing on rubber isolator

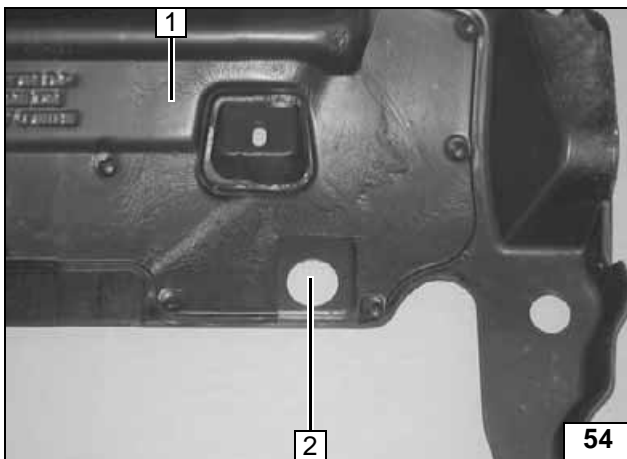

- 1 Underide protection
- 2 42 mm dia. hole




Cutting out underide protection

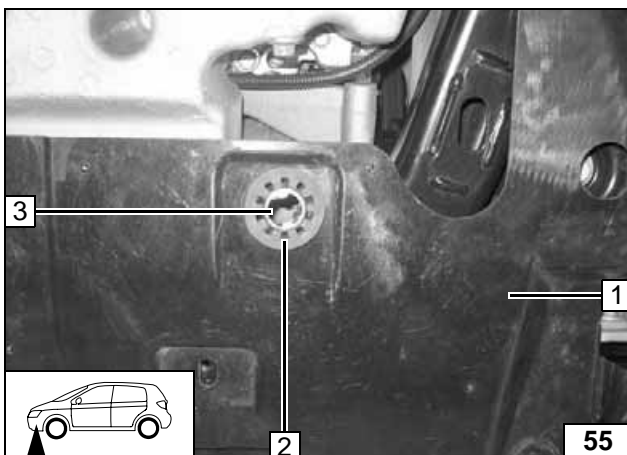

Align red (rt) rubber isolator 2 with groove flush on exhaust end section 3 and on underide protection 1.



Aligning rubber isolator



Final Work

WARNING!


Reassemble the disassembled components in reverse order.

Check all hoses, hose, spring and Caillau clamps, as well as all electrical connections for firm seating.

Secure all loose cables using cable ties.

Only use manufacturer-approved coolant.

Spray the heater unit components with anti-corrosion wax (Tectyl 100K, Order No. 111329).

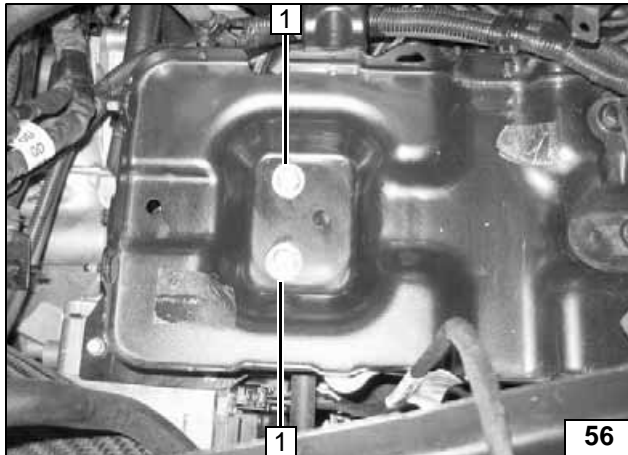

1 M8x30 bolt, spring lockwasher, flanged nut
[2x each]

Installing
battery car-
rier

- Connect the battery
- Bleed and fill the coolant circuit according to the vehicle manufacturer's specifications.
- Set the digital timer.
- Set the manual air conditioning or automatic air conditioning according to the "operating instructions for the end customer".
- Check the proper operation of the additional heater, see the operating instructions/installation instructions.
- Attach the "Switch off additional heater before refueling" sticker to the left-hand B-pillar.



Webasto

Feel the drive

Operating Instructions for End Customer



Please remove page and add to the vehicle operating instructions.

Note:

We recommend matching the heating time to the driving time.


Heating time = driving time

Example:

For a driving time of approx. 20 min. (in one direction), we recommend not exceeding a switch-on time of 20 min.


If the summer/winter switch option has been installed, this must be switched in accordance with the time of year. The heater unit will then only switch on the vehicle fan to ventilate the vehicle interior in the position Winter heat and in the position Summer .

Before parking the vehicle, make the following settings:

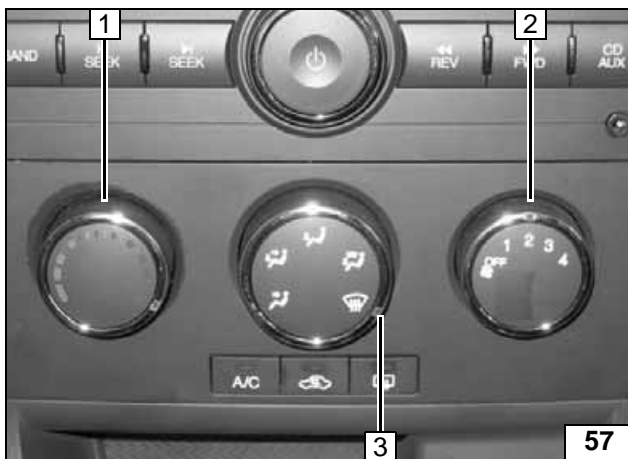

- 1 Set temperature to "max."
- 2 Set fan to level "1", or possibly "2"
- 3 Direct air outlet toward windshield

Manual air conditioning

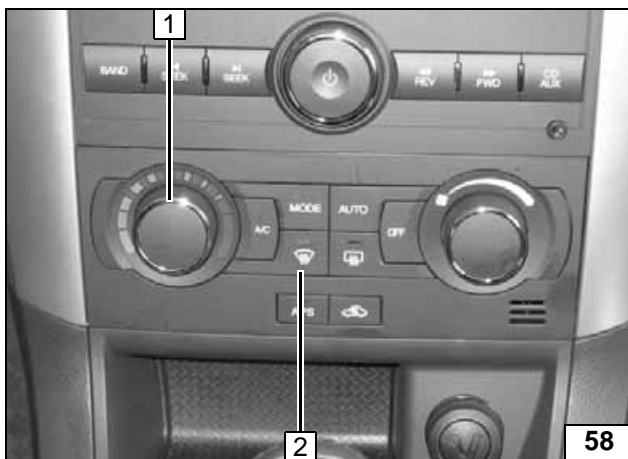

- 1 Set temperature to "max."
- 2 Air outlet to windshield

Automatic air-conditioning